Confidence-Aware Ontology-Based Inference for Missing Edge Prediction in Knowledge Graphs

Experiments on the **CoDEx-M** benchmark

Project Report

Master of Technology in Computer Science and Engineering with Specialization in Data Science and Artificial Intelligence

by

SUGITHRA C S

25021396

Under the Guidance of

Dr. Shailesh Sivan

Assistant Professor
Department of Computer Science, CUSAT



DEPARTMENT OF COMPUTER SCIENCE
COCHIN UNIVERSITY OF SCIENCE AND TECHNOLOGY

November 2026

DECLARATION

I, **Sugithra C S (Register Number: 25021396)**, hereby declare that this project report entitled **"Confidence-Aware Ontology-Based Inference for Missing Edge Prediction in Knowledge Graphs"**, submitted to the Department of Computer Science, Cochin University of Science and Technology, in partial fulfilment of the requirements for the degree of Master of Technology in Computer Science and Engineering with Specialization in Data Science and Artificial Intelligence, is a record of original work carried out by me under the guidance of **Dr. Shailesh Sivan, Assistant Professor, Department of Computer Science, CUSAT**.

I further declare that this work has not been submitted elsewhere for the award of any degree, diploma, or other similar title, and that all sources of information and material used in this report have been duly acknowledged and properly cited.

Ernakulam-682022
November 2026

Sugithra C S
(Register No: 25021396)
Department of Computer Science
CUSAT

Student Signature: _____

Dr. Shailesh Sivan
Assistant Professor
Department of Computer Science, CUSAT

Guide Signature: _____

Abstract

Knowledge graphs are always incomplete. Rule-based completion predicts missing facts and can show the training facts behind each prediction. This report reviews 43 research papers on knowledge graph completion, rule learning, rule confidence, ontology-based reasoning, explainability, embeddings, graph neural networks and evaluation. It then describes the rule-based completion system built on the CoDEx-M benchmark (185,584 training triples, 17,050 entities and 51 relations).

The system checks the dataset splits, builds a training graph and an RDF/OWL representation of it, and mines one- and two-atom rules from training data. A set of 160 rules, reviewed on the validation split, produces 184,487 candidate triples that are not in the training graph. Each candidate is scored by the Wilson lower bound of its best rule and is explained by the training facts that support it. Two rankings, V1 and V2, differ only in how they break ties. Per-relation caps of 100, 250, 500 and 1,000 were compared on validation, and the selected configuration (cap 1,000, V2) was then evaluated on the test split. It makes 23,772 predictions: 927 match test positives and 73 match supplied negatives. Its benchmark precision is 92.70%, recall 8.99%, F1-score 16.39% and positive hit rate 3.90%. The 22,772 unlabelled predictions are treated as unknown, not false. The test split was used twice, the ontology does not yet affect the score, and no ranking metric or embedding baseline has been run. The result is a transparent, reproducible baseline and a plan for ontology-aware scoring, ranked evaluation and baseline comparison.

Keywords: knowledge graph completion; missing-edge prediction; logical rule mining; PCA confidence; Wilson lower bound; ontology; RDF/OWL; explainability; open-world assumption; CoDEx-M

ACKNOWLEDGEMENT

I am grateful to the Department of Computer Science, Cochin University of Science and Technology, for providing the academic foundation and research environment that enabled the progress of this project. The coursework, laboratory exposure, and technical guidance I received from the department contributed significantly to the methodological and analytical skills applied throughout this work.

I would like to express my sincere gratitude to my project guide, **Dr. Shailesh Sivan, Assistant Professor, Department of Computer Science**, for his constant support, insightful feedback, and expert supervision. His guidance has been instrumental in shaping the research direction, deepening my understanding, and improving the overall quality of this work.

I also express my sincere gratitude to **Dr. Bijoy A. Jose, Associate Professor and Head of the Department**, for his support and encouragement throughout this project.

I would also like to thank the faculty members of the Department of Computer Science for their encouragement, as well as the broader knowledge graph and machine learning research community whose published work on knowledge graph embedding, reasoning, and rule learning provided valuable insights that inspired this project.

Finally, I express my heartfelt gratitude to my family and friends for their continuous encouragement, patience, and unwavering support throughout this research journey.

Contents

Abbreviations **viii**

1 Introduction **1**
1.1 Key terms in plain language . . . 1
1.2 Organisation of the report . . . 2

2 Motivation **2**

3 Literature Review **3**
3.1 Scope, review questions and selection of papers . . . 3
3.2 Comparison with existing surveys . . . 4
3.3 Overview of the reviewed papers . . . 6
3.4 Rule-based knowledge graph completion and logical rule learning . . . 7
3.5 Rule confidence and candidate-specific scoring . . . 8
3.6 Ontology-based reasoning and semantic constraints . . . 9
3.7 Explainable knowledge graph inference . . . 10
3.8 Neural-symbolic reasoning and differentiable rule learning . . . 11
3.9 Knowledge graph embeddings and link prediction . . . 12
3.10 Graph neural networks and advanced learning methods . . . 12
3.11 Knowledge graph surveys, benchmarks and evaluation . . . 13
3.12 Development of the field . . . 14
3.13 Common limitations and open challenges . . . 15
3.14 Trends and key lessons . . . 15
3.15 Research gap analysis . . . 15

4 Project Overview **16**
4.1 Problem statement . . . 16
4.2 Objectives . . . 17
4.3 Original proposal and its realisation . . . 17
4.4 Scope and expected contribution . . . 18
4.5 Research questions . . . 18
4.6 Comparative analysis . . . 18

5 Proposed Methodology and Architecture **19**
5.1 Published approaches and the conceptual pipeline . . . 19
5.2 Architecture of the implemented system . . . 19
5.3 Workflow pipeline . . . 19
5.4 Data and splits . . . 20
5.5 Graph construction and visualisation . . . 21
5.6 RDF/OWL ontology generation . . . 22
5.7 Rule mining and validation review . . . 23
5.8 Candidate generation, scoring and V1/V2 ranking . . . 24
5.9 Worked examples from the saved results . . . 25
5.10 Prediction explorer . . . 25
5.11 Evaluation protocol and metrics . . . 27
5.12 Cap experiment and validation-based selection . . . 27

6 Implementation Plan and Tools **27**
6.1 Tools and implementation status 27
6.2 Rule mining results 28
6.3 Candidate generation results 28
6.4 Baseline test evaluation at cap 100 (Phase 6) 28
6.5 Cap experiment on the validation split 29
6.6 Final test evaluation of the selected configuration 29
6.7 Discussion 30
6.8 Verification and reproducibility 32

7 Gantt Chart **32**

8 Milestones and Deliverables **33**

9 Conclusion **34**
9.1 Limitations 34
9.2 Future work 35

10 References **35**

List of Figures

1.1 Two-hop rule inference with genuine CoDEx-M facts 1
3.1 Selection of the reviewed papers from the supplied archive. 4
3.2 Taxonomy of the 43 reviewed papers by research theme, with the principal methods in each theme and the implementation status of the theme in this project († = selected paper). 5
3.3 The 43 reviewed papers (a) by publication year and (b) by research theme. . . . 6
5.1 Architecture of the Proposed Rule-Based Knowledge Graph Completion System Using CoDEx-M. Green: implemented stages that use training data (block 3 also uses validation for the rule review); blue: stages that use held-out data; dashed orange: planned future work. The test split was used twice, first for the cap-100 baseline and later for the selected cap-1,000 V2 configuration. 20
5.2 Workflow pipeline of the project. Green: stages on training data (stage 5 also reviews rules on validation); blue: validation-based selection and final test; dashed orange: the earlier cap-100 test baseline. 20
5.3 The 20 most frequent relations in the CoDEx-M training graph (from the saved graph statistics). 21
5.4 Screenshots of the training-graph viewer: entity search and relationship panel (top) and the drawn one-hop neighbourhood of Katherine Jackson (bottom). Only training triples are shown. 22
5.5 The triples of Table 5.3 drawn by named graph. The training assertions are kept apart from labels and provenance, so the rule miner can select them explicitly. . . 23
5.6 Prediction explorer, default graph view: the 250 best-ranked of 3,648 predicted triples; dashed edges are predictions coloured by score band (green ≥ 0.7, orange 0.4–0.7, red < 0.4). 25
5.7 Entity search and entity view for Katherine Jackson: 15 training edges (solid) and 2 predicted edges (dashed): spouse → Joe Jackson (score 0.918) and place of burial → Forest Lawn Memorial Park (score 0.377). 26
5.8 Evidence view and provenance panel for the prediction (Katherine Jackson, spouse, Joe Jackson): both supporting rules with their statistics and the training groundings drawn as solid edges. 26
5.9 Prediction table filtered to V2 and spouse (P26), sorted by rank (left), and the V1-versus-V2 comparison tab showing 2,830 predictions kept in both, 409 dropped, 409 added and 1,499 with a changed rank (right). 26
6.1 Cap comparison on the validation split, recreated from the saved validation and selection results. The summary (top left) gives the configuration selected by rule A1 and its final test values; the panels show how each metric changes with the cap for V1 and V2. The black ring marks the selected configuration (cap 1,000, V2); in the precision panel the dotted line is the Wilson lower bound for V2 and the dashed line is its selection floor. 30
6.2 Test-split comparison of the three evaluated configurations, plotted from the saved test results. 31
6.3 Screenshot of the test section of the cap-comparison dashboard; its values agree with Table 6.4. 31
6.4 Positive and supplied-negative test matches of cap 1,000 V2 for the 15 relations with the most matches (from the saved per-relation test metrics). 31
7.1 Gantt chart of the seven project tasks. Dark green: completed, placed from dated project outputs; light green: completed, period approximate; yellow: ongoing; blue: planned future work (dates to be confirmed). The red line marks the end of November 2026. 33

List of Tables

1.1 Key terms used in this report. . . . 1
3.1 The five selected papers (the *selected five* folder of the archive). . . . 4
3.2 Comparison of the reviewed surveys with this review. . . . 5
3.3 Charting of the 29 method papers (R = explicit rules; O = ontology or concepts; E = embeddings; N = learned neural scoring; X = explanation as a design goal). 6
3.4 Comparative review of existing research approaches: rule-based knowledge graph completion and logical rule learning. . . . 7
3.5 Comparative review of existing research approaches: rule confidence and candidate-specific scoring. . . . 9
3.6 Comparative review of existing research approaches: ontology-based reasoning and semantic constraints. . . . 10
3.7 Comparative review of existing research approaches: explainable knowledge graph inference. . . . 11
3.8 Comparative review of existing research approaches: neural-symbolic reasoning and differentiable rule learning. . . . 11
3.9 Comparative review of existing research approaches: embeddings, graph neural networks, surveys, benchmarks and evaluation. . . . 13
3.10 Development of the main reviewed approaches by year. . . . 14
3.11 Research gap analysis: gaps supported by the literature and their status in this project. . . . 15
4.1 Objectives, status, evidence and planned extensions. . . . 17
4.2 Elements of the original proposal compared with the implementation. . . . 17
5.1 Conceptual pipeline stages in published approaches and in the implemented system. 19
5.2 CoDEx-M files, verified from `outputs/phase1_dataset_report.md`. Entities and relations are those occurring in each file. . . . 21
5.3 Genuine triples from the RDF/OWL dataset (namespace prefixes shortened). . . . 22
5.4 Genuine rules from the frozen 160-rule set. Supp. = support; Body = body size; Std = standard confidence. Wilson bounds in the set range from 0.079 to 0.957. . 24
6.1 Implementation status of the pipeline stages. . . . 28
6.2 Test evaluation of the cap-100 baseline (`outputs/phase6/evaluation_test/evaluation_results.json`). . . . 29
6.3 Validation comparison of the eight configurations; recall over 10,310 validation positives. Prec. lower = Wilson 95% lower bound. Highlighted: the configuration selected by rule A1. . . . 29
6.4 Test results of the cap-100 baseline (Phase 6) and of the selected cap-1,000 V2 configuration (second use of the test split). . . . 30
7.1 Project tasks, status and evidence (same tasks as Figure 7.1). . . . 33
8.1 Milestones and deliverables. . . . 33

Abbreviations

Abbreviation	Meaning
KG	Knowledge graph
KGC	Knowledge graph completion
CoDEx-M	Medium-sized CoDEx benchmark derived from Wikidata and Wikipedia [44]
RDF	Resource Description Framework
OWL	Web Ontology Language
TriG	RDF serialisation format that supports named graphs
OWA	Open-world assumption
PCA	Partial completeness assumption (PCA confidence)
TP / FP / FN	Matches to test positives / matches to supplied negatives / unpredicted positives
V1 / V2	Ranking version 1 / version 2 (different tie-breaks of the same score)
MRR	Mean reciprocal rank
Hits@K	Share of queries whose correct answer is among the top K ranked answers
GNN / GCN	Graph neural network / graph convolutional network
EM	Expectation maximisation
F1	Harmonic mean of precision and recall
UI	User interface

1 Introduction

A knowledge graph (KG) stores facts as directed, labelled links between entities. Each fact is a triple (head, relation, tail), also written $r(h, t)$; in the Resource Description Framework (RDF) it is a subject–predicate–object triple. KGs support search, question answering, recommendation and data integration [36,37]. Real KGs are built largely by automated extraction and are never complete [1,6]: if a triple is absent, the graph does not say that it is false; it only fails to record it. Predicting absent but plausible triples is called knowledge graph completion, link prediction or missing-edge prediction [35,36,38].

A logical rule expresses a regular pattern in the graph. Figure 1.1 uses two genuine training facts of the CoDEx-M benchmark used in this project. The rule $\text{educatedAt}(X, Y) \wedge \text{country}(Y, Z) \Rightarrow \text{citizenOf}(X, Z)$ was mined from the training graph, and applied to the two facts it derives the candidate (Jeremy Piven, country of citizenship, United States of America). The candidate is not in the training graph, it is a triple of the held-out test split, and it can be traced to its rule and to the facts that produced it [1,4,12].




Figure 1.1: Two-hop rule inference with genuine CoDEx-M facts. Solid edges: training triples (`data/train.txt`); dashed edge: the candidate derived by the mined rule $\text{P69}(x, y) \wedge \text{P17}(y, z) \Rightarrow \text{P27}(x, z)$ (PCA confidence 0.841, Wilson lower bound 0.810, support 543). The candidate is a test positive; it was predicted from training data only.

Real rules are not always true, so each carries a confidence: the proportion of body matches for which the head also holds. Wu et al. [2] and Zhang et al. [6] note that such statistics can mislead when the graph is incomplete, and Evoda [2] therefore adopts the PCA confidence. An ontology defines classes, relation types and constraints such as domains and ranges, and ontology-based reasoning is one of the main groups of KG reasoning [33]; it has been used to make completion more consistent [7]. In this project an RDF/OWL representation of the training graph is generated, but it does not yet influence the prediction score (Section 5). Explanations matter as well: explainability is a stated challenge for approaches that integrate logics with embeddings [6] and a motivation for path-based completion [10].

1.1 Key terms in plain language

Table 1.1 explains the terms used throughout the report.

Table 1.1: Key terms used in this report.

Term	Meaning in this report	Used in
Triple	A fact (subject, relation, object) with Wikidata-style IDs, e.g. (Q315083, P27, Q30)	Ch. 5
Rule	A pattern body $\Rightarrow$ head with one or two body atoms, e.g. $\text{P26}(z, x) \Rightarrow \text{P26}(x, z)$	Sec. 5.7
Support	Number of distinct body pairs (or couples) for which the head is also a training triple	Sec. 5.7
Standard / PCA confidence	Support divided by all body pairs / by body pairs whose subject (or object) already has some head fact	Sec. 5.7

Wilson lower bound	95% lower confidence bound of the PCA confidence; penalises rules with little evidence	Sec. 5.7
Candidate	A triple derived by a rule from training facts that is not itself a training triple	Sec. 5.8
Grounding / body match	The training triples that make a rule body true for a candidate	Sec. 5.8
Cap	The maximum number of ranked predictions kept for each relation	Sec. 5.12
Supplied negative	A triple from `valid_negatives.txt` or `test_negatives.txt`, distributed with CoDEx-M as a negative example	Sec. 5.11
Unlabelled prediction	A prediction that is neither a held-out positive nor a supplied negative; not counted as false	Sec. 5.11
Benchmark precision	TP/(TP+FP), computed over labelled predictions only	Sec. 5.11

1.2 Organisation of the report

Section 2 gives the motivation, Section 3 the thematic literature review of 43 papers and the research-gap analysis, Section 4 the project overview, Section 5 the methodology and architecture, Section 6 the implementation, tools and verified results, Sections 7–8 the Gantt chart, milestones and deliverables, and Section 9 the conclusion.

2 Motivation

Incomplete graphs. Missing relationships limit downstream reasoning and knowledge discovery [6,35]. In CoDEx-M, the validation and test splits hold 20,621 positive triples that are not in the training graph (Section 5.4).

Explanations beyond embeddings. Embedding models are strong link predictors [19, 20,38], but surveys note that embeddings can lack interpretability and encode biases [40], that integrated logic-and-embedding methods often remain black boxes [6], and that symbolic rule learning gives transparent paths [43]. These statements concern the surveyed methods in general; some work mines rules from embeddings [17]. Rule-based inference offers a direct way to justify a link by supporting facts [1,12].

Global rule confidence versus candidate evidence. A rule usually has one weight for the whole graph, which ignores the query instance [4]: two candidates from the same rule share a confidence although one may rest on many paths and the other on one. The implemented system scores with a global rule statistic and uses the number of distinct training proofs only as a tie-break (ranking V2).

Open-world uncertainty. A missing triple may be false or merely unobserved [34]. A prediction that matches neither a held-out positive nor a supplied negative is therefore *unlabelled*, not an error, and every precision figure in this report is computed only over labelled predictions.

Ontologies and transparent evaluation. An ontology could check the semantic compatibility of candidates [7–9]; this is a hypothesis for future work, and constraints do not automatically improve accuracy. Benchmarks do not guarantee diverse logic patterns and their silver-standard correctness is questioned [6], and tied scores can make naive rankings optimistic [4], so evaluation needs a documented split protocol and verified numbers (Sections 5.11 and 6.6).

Reliable and interpretable completion matters where wrong inferences are costly, such as healthcare data integration, industrial fault prediction and responsible AI [9,11,32]. Users need to know why a link was proposed, how far it can be trusted and how it was evaluated.

3 Literature Review

Knowledge graph completion (KGC) predicts facts that are missing from an incomplete graph. Two broad families exist. Symbolic methods learn explicit rules and can show the facts behind every prediction; neural and embedding methods score triples in a learned vector space and are usually stronger link predictors but harder to explain [6, 33, 35]. Recent work tries to combine the two, for example by giving rules query-dependent weights or by adding ontology knowledge to neural models [4, 7]. This section reviews that literature in order to position the rule-based, ontology-aware approach of this project.

The main contributions of the review are as follows:

- a thematic review of 43 unique papers from the supplied archive, grouped into eight research themes;
- a structured comparison of the methods, data, contributions and limitations in each theme;
- a summary of publication trends and of the method properties of the reviewed approaches;
- a set of common limitations and open challenges, and a research-gap analysis that motivates the project.

3.1 Scope, review questions and selection of papers

Review questions. The review is guided by four questions:

- **LQ1:** How do current methods discover logical rules and estimate their confidence?
- **LQ2:** How are rule evidence and ontology knowledge used to score a candidate missing edge?
- **LQ3:** How do the methods explain their predictions, and how are they evaluated?
- **LQ4:** Which limitations remain open for an explainable, ontology-aware rule-based system?

Eligibility criteria. This is a structured thematic review of a supplied paper archive, not a systematic database search. A paper was included if it (i) was in the supplied research-paper archive, (ii) concerns knowledge graph completion, reasoning, rule learning, ontology-based reasoning, explainability, or the embedding, graph-learning and evaluation work on which these depend, (iii) is a unique paper, and (iv) has bibliographic details that could be checked against its PDF.

Selection. Figure 3.1 summarises the selection. The archive holds 50 PDF files: 45 in the main folder and 5 in the sub-folder *selected five*. The five files in *selected five* are copies of papers that are also in the main folder, one paper appears twice in the main folder (*Anytime bottom-up rule learning for large-scale knowledge graph completion*), and the Cao et al. survey is present in two versions (the published article and the authors' deposited copy). After these seven repeats are removed, **43 unique papers** remain, and all 43 are cited. The only reference outside the archive is the CoDEx dataset paper [44], which is cited as the source of the benchmark. Of the 43 papers, 41 are peer-reviewed and 2 are arXiv preprints [4, 5].

Selected papers. The five papers of the *selected five* folder are the core references of the project (Table 3.1); they are marked with † throughout the section. They are discussed in their thematic sections, so the review keeps a single thematic order rather than placing them in a separate block.

Depth of reading. Nine papers [1, 2, 4–6, 12–15] were read in targeted full-text sections, three more [3, 7, 10] at the level of abstract, definitions, datasets and conclusion, and 31 at the level of abstract, introduction and key sections. Limitations are given only where the text supports them; limitations *stated* by the authors are separated from observations made in this review (marked *Own*).

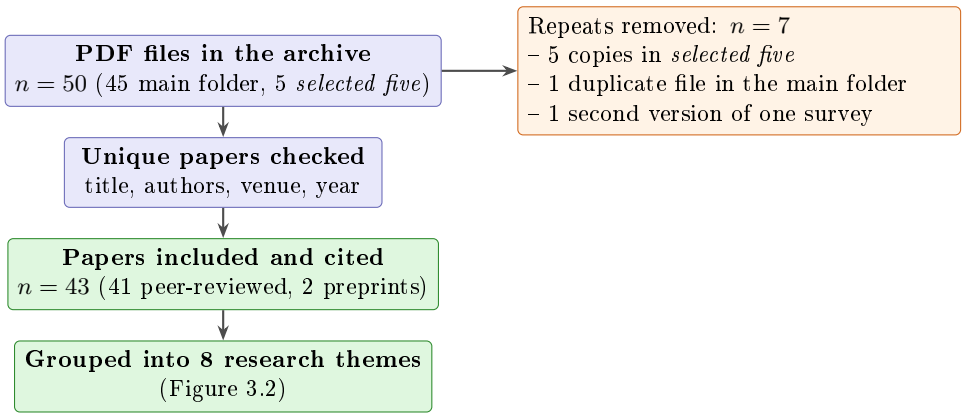


Figure 3.1: Selection of the reviewed papers from the supplied archive.

Table 3.1: The five selected papers (the *selected five* folder of the archive).

No.	Ref.	Exact title (authors, year)	Theme
S1	[2]	Rule learning over knowledge graphs with genetic logic programming (Wu et al., 2022)	Rule-based KGC and rule learning
S2	[4]	SLogic: Subgraph-Informed Logical Rule Learning for Knowledge Graph Completion (Le et al., 2025)	Rule confidence and candidate-specific scoring
S3	[5]	Probabilistic Circuits for Knowledge Graph Completion with Reduced Rule Sets (Patil et al., 2025)	Rule confidence and candidate-specific scoring
S4	[12]	Differentiable Learning of Logical Rules for Knowledge Base Reasoning (Yang, Yang and Cohen, 2017)	Neural-symbolic and differentiable rule learning
S5	[39]	Knowledge Graph Embedding: A Survey from the Perspective of Representation Spaces (Cao et al., 2024)	Surveys, benchmarks and evaluation

Categorisation criteria. Each paper is assigned to one theme by its principal method and its role in missing-edge prediction: how rules are discovered; how a candidate is scored or combined; whether ontology semantics influence reasoning; whether the justification of a prediction is a design goal; whether rules or weights are learned by neural methods; whether triples are scored by embeddings; whether graph neighbourhoods are learned; or whether the paper defines surveys, benchmarks and evaluation. Themes, and the papers within them, are ordered by relevance to the project, from rule-based completion towards general background. Figure 3.2 shows the taxonomy and how far each theme is reflected in the current CoDEx-M implementation. Each theme ends with a comparative table whose last row positions this project.

Data charting. For every paper the review records its year, venue type, theme, method, data and evaluation protocol, main contribution, limitations and relevance to the project. These fields form the comparative tables at the end of each theme. Results were synthesised narratively, because the papers use different datasets, splits and metrics, so their numbers cannot be pooled.

3.2 Comparison with existing surveys

Fourteen of the reviewed papers are surveys or reviews (Table 3.2). They cover knowledge graph reasoning in general [33, 34, 36], completion [35], logics with embeddings [6], embedding models [37–42], graph neural networks [28,29] and temporal reasoning [43]. None of them focuses on how the *confidence of a rule* and *ontology knowledge* can be combined in the score of a single candidate edge, or on how such a score should be evaluated when most predictions cannot be labelled. This review concentrates on these questions.

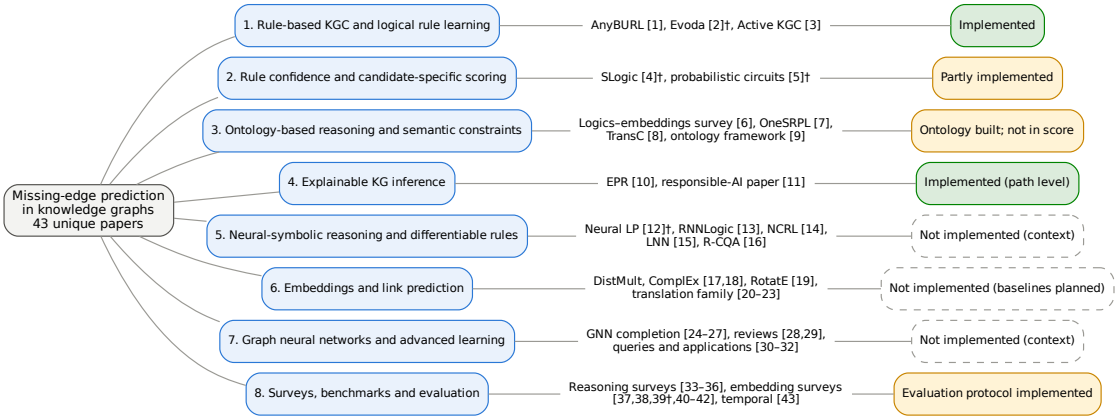


Figure 3.2: Taxonomy of the 43 reviewed papers by research theme, with the principal methods in each theme and the implementation status of the theme in this project († = selected paper).

Table 3.2: Comparison of the reviewed surveys with this review.

Survey	Year	Type	Scope
Wang et al. [37]	2017	Journal survey	Embedding approaches and applications
Wang, Qiu and Wang [38]	2021	Journal survey	Embeddings for link prediction
Gesese et al. [42]	2021	Journal survey	Embeddings with literals
Ji et al. [36]	2022	Journal survey	Representation, acquisition and applications of KGs
Ye et al. [28]	2022	Journal survey	Graph neural networks for KGs
Biswas et al. [40]	2023	Journal survey	Open challenges of embeddings
Cao et al. [39]†	2024	Journal survey	Embeddings by representation space
Khemani et al. [29]	2024	Journal review	Graph neural networks in general
Zhang et al. [6]	2024	Conference survey	Reasoning with logics and embeddings
Liu et al. [33]	2025	Journal survey	KG reasoning methods and applications
Li et al. [35]	2025	Journal review	KG completion: methods and limitations
Sardina et al. [41]	2025	Conference survey	Graph structure and embeddings
Wang and Li [43]	2025	Conference survey	Temporal KG reasoning
Niu et al. [34]	2026	Journal survey	KG reasoning approaches and applications
This review	2026	Thematic review	Rule confidence, candidate scoring, ontology use and open-world evaluation

3.3 Overview of the reviewed papers

Figure 3.3 shows the reviewed papers by year and by theme. The embedding families date mainly from 2013–2016, rule learning with neural methods from 2017–2023, and the most recent work (2024–2026) concerns query-dependent rule scoring, ontology-enhanced reasoning, explainable path reasoning and surveys. Graph neural networks and surveys form the two largest groups, while rule confidence and explainability have only two papers each, which already points to the gaps discussed in Section 3.15.

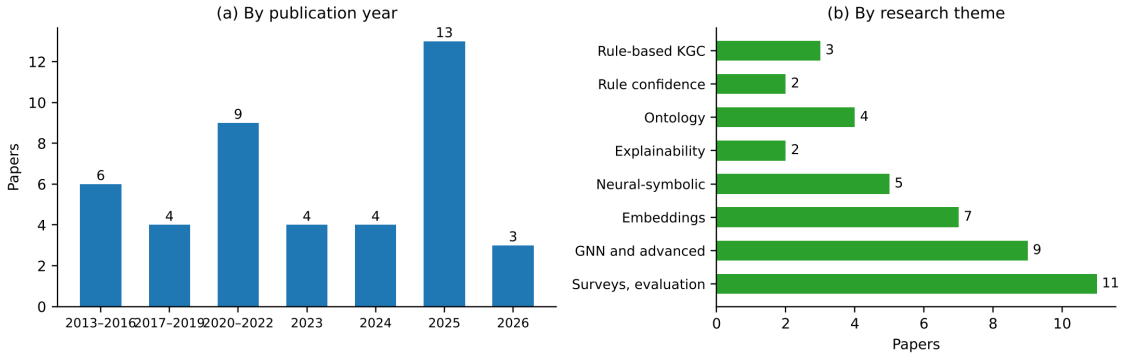


Figure 3.3: The 43 reviewed papers (a) by publication year and (b) by research theme.

Table 3.3 charts the 29 method papers by five properties: whether they use explicit *rules* (R), *ontology* or concept knowledge (O), *embeddings* (E), *neural* learning of scores or weights (N), and whether *explanation* is a stated design goal (X). Rules appear in 10 papers, but only 2 of them (SLogic and the probabilistic-circuits paper) make the evidence for one candidate the focus of the score; ontology knowledge appears in 3 papers and always inside a learned model or a data framework; and explanation is the main design goal of only 2 papers.

Table 3.3: Charting of the 29 method papers (R = explicit rules; O = ontology or concepts; E = embeddings; N = learned neural scoring; X = explanation as a design goal).

Paper	Year	Venue	Theme	R	O	E	N	X
AnyBURL [1]	2024	Journal	Rule-based KGC	✓				
Evoda [2]†	2022	Conference	Rule-based KGC	✓				
Active KGC [3]	2022	Journal	Rule-based KGC	✓				
SLogic [4]†	2025	Preprint	Rule confidence	✓			✓	
Probabilistic circuits [5]†	2025	Preprint	Rule confidence	✓				
OneSRPL [7]	2026	Journal	Ontology		✓		✓	
TransC [8]	2018	Conference	Ontology		✓	✓		
Ontology framework [9]	2025	Conference	Ontology		✓			
EPR [10]	2026	Journal	Explainability				✓	✓
Responsible AI [11]	2025	Magazine	Explainability					✓
Neural LP [12]†	2017	Conference	Neural-symbolic	✓			✓	
RNNLogic [13]	2021	Conference	Neural-symbolic	✓			✓	
NCRL [14]	2023	Conference	Neural-symbolic	✓			✓	
LNN [15]	2022	Conference	Neural-symbolic	✓		✓	✓	
R-CQA [16]	2025	Conference	Neural-symbolic	✓		✓	✓	
DistMult [17]	2015	Conference	Embeddings			✓		
ComplEx [18]	2016	Conference	Embeddings			✓		
RotatE [19]	2019	Conference	Embeddings			✓		

Paper	Year	Venue	Theme	R	O	E	N	X
TransE [20]	2013	Conference	Embeddings			✓		
TransH [21]	2014	Conference	Embeddings			✓		
TransR [22]	2015	Conference	Embeddings			✓		
TransM [23]	2014	Conference	Embeddings			✓		
MulGA [24]	2025	Journal	GNN				✓	
ERA-GCN [25]	2021	Conference	GNN			✓	✓	
KGE-based GCN [26]	2023	Conference	GNN			✓	✓	
SEGCN [27]	2023	Conference	GNN				✓	
RConE [30]	2025	Journal	GNN / queries			✓	✓	
Process KG GNN [31]	2025	Conference	GNN / application				✓	
IIoT fault prediction [32]	2025	Conference	Application				✓	
Total (29 papers)				10	3	13	15	2
This project	2026	–	Rule-based KGC	✓	built, not scored			✓

The rest of this section discusses the themes in order of relevance to the project.

3.4 Rule-based knowledge graph completion and logical rule learning

Grouping criterion: papers whose principal contribution is how logical rules are discovered and given a confidence for missing-edge prediction. AnyBURL [1] is the closest published counterpart of the implemented system: it samples paths bottom-up, generalises them to rules, estimates the standard confidence of each rule by sampling, and ranks candidates by the highest confidence of any predicting rule; its authors report that object-identity constraints remove quasi-redundant rules with overrated confidence. Evoda [2]† searches a general Datalog rule space with genetic logic programming under the open-world assumption and replaces the standard confidence by the PCA confidence. Omran et al. [3] define support and confidence over distinct entity pairs and learn open-path rules that can generate queries for entities missing from the graph.

The implemented system takes three ideas from this group: support and confidence counted over *distinct entity pairs* [3] rather than paths, the PCA confidence of Evoda [2], and the maximum aggregation of AnyBURL [1] (a candidate takes the best score of its supporting rules). It enumerates one- and two-atom rules exhaustively instead of sampling or genetic search, which is transparent and reproducible but excludes longer rules and rules with constants.

Table 3.4: Comparative review of existing research approaches: rule-based knowledge graph completion and logical rule learning.

Paper (year)	Objective and method	Inference or scoring	Data and evaluation	Contribution and limitation	Relevance to this project
[1] Meilicke et al. (2024); journal	Scalable symbolic rule learning; bottom-up path sampling and generalisation	Maximum confidence of predicting rules (standard confidence, sampled)	FB15k, YAGO3-10, Wikidata5M, Freebase; MRR, Hits@k, time, energy	Higher prediction quality and lower run time than baselines on large data. *Stated:* maximum aggregation is chosen for scale although other aggregations perform slightly better	Closest counterpart: maximum aggregation adopted (G1, G5)

Paper (year)	Objective and method	Inference or scoring	Data and evaluation	Contribution and limitation	Relevance to this project
[2]† Wu et al. (2022); conference	Rule learning under the OWA with a general rule language; genetic search	PCA confidence; rule confidence assigned to predictions	YAGO, DBpedia, Wikidata for rule quality; WN18, YAGO3-10 for completion; Hits@k, MRR	Higher-quality rules and more precise predictions than compared miners. *Stated:* future work on constants and rule simplification	Source of the PCA confidence used in the miner (G1, G6)
[3] Omran et al. (2022); journal	Rules that generate queries for missing entities; open-path rules (OPRL)	Standard confidence and head coverage over entity pairs	Adaptations of Freebase, YAGO2, Wikidata, Poker; precision and recall of queries	Mines accurate rules from KGs with up to 8M facts. *Own:* open-path setting differs from closed two-atom rules	Pair-based support and head coverage adopted (G6)
This project	Exhaustive one- and two-atom rules (symmetry, inverse, subrelation, chain, reversed chain)	Max Wilson lower bound of PCA confidence	CoDEx-M; exact-set benchmark precision, recall, F1	160 frozen rules. *Limits:* no rules longer than two atoms, no constants; 6 hub bodies skipped	Implemented (Ch. 5)

3.5 Rule confidence and candidate-specific scoring

Grouping criterion: papers that change how the evidence for a candidate is scored or combined, instead of using one global confidence per rule. SLogic [4]† argues that a global rule weight ignores the query and computes query-dependent rule scores with a graph neural network over the subgraph of the head entity; on FB15k-237 it reports MRR 0.30 and Hits@1 21.9%, and its authors state training and subgraph overhead and chain-like rules only as limitations. Patil et al. [5]† address the combination of rules: a probabilistic circuit over rule sets, without independence assumptions, reaches the peak performance of the AnyBURL baseline with 70–96% fewer rules on eight datasets, which include FB15K-237 and CoDEx-S (the small CoDEx variant, not CoDEx-M). SLogic changes the score of a rule; the circuits paper changes how rules are combined.

The implemented system does neither in the score itself: a candidate's score is the maximum Wilson lower bound of its rules' PCA confidence, which shrinks the score of rules with little evidence but remains global per rule. Ranking V2 introduces one candidate-specific quantity, the number of distinct training proofs (body matches), but only as a tie-break inside groups of equal score. The cap experiment shows that this tie-break alone raises validation matches at every cap (Section 6.5).

Table 3.5: Comparative review of existing research approaches: rule confidence and candidate-specific scoring.

Paper (year)	Objective and method	Inference or scoring	Data and evaluation	Contribution and limitation	Relevance to this project
[4]† Le et al. (2025); preprint	Query-dependent rule scores from the head-entity subgraph	GNN-based weights over simple-path rules; coverage penalty	FB15k-237, WN18RR, YAGO3-10, NATIONS; filtered MRR, Hits@k	On FB15k-237 MRR 0.30, Hits@1 21.9%. *Stated:* overhead of positive–negative sample generation and fixed-size subgraphs; chain-like Horn clauses only	Motivates candidate-specific evidence (G1, G2)
[5]† Patil et al. (2025); preprint	Smaller, interpretable rule sets; probabilistic circuits over rule sets	Exact or lower-bound probability of a candidate	Eight datasets incl. FB15K-237 and CoDEx-S; filtered Hits@k, MRR	70–96% fewer rules reach peak baseline performance. *Own:* no dedicated limitations section	Motivates principled aggregation of rule evidence (G2, G5)
This project	Max Wilson lower bound; V2 tie-break by distinct body matches	Global per-rule score; evidence used only for ties	CoDEx-M; validation and test exact-set metrics	V2 adds 21 test matches at cap 100 with the same 13 FP. *Limit:* evidence not in the score; not calibrated	Partly implemented

3.6 Ontology-based reasoning and semantic constraints

Grouping criterion: papers in which ontology semantics, class hierarchies or logical schemas influence reasoning. Reasoning based on ontologies is one of the main groups of KG reasoning [33]. Zhang et al. [6] survey logics and embeddings and observe that few methods support general ontological schemas. OneSRPL [7] injects ontology semantics into subgraph reasoning and reports better results than its baselines on inductive subsets of WN18RR, FB15k-237 and NELL-995; TransC [8] models concepts as spheres and instances as vectors; and Balakrishnan et al. [9] use domain ontologies for healthcare data interoperability without addressing completion.

In the cited completion work the ontology is an input to a learned model. In this project the Phase 3 RDF/OWL dataset contains the training assertions in a named graph, declares entities as `owl:NamedIndividual` and relations as `owl:ObjectProperty`, and deliberately adds no domain, range, inverse, symmetry or class axioms, because CoDEx-M supplies no verified entity types or relation constraints (Section 5.6). The rule miner reads its training named graph, but no ontology semantics enter rule selection, candidate generation or scoring, so the ontology is not yet a semantic constraint on predictions.

Table 3.6: Comparative review of existing research approaches: ontology-based reasoning and semantic constraints.

Paper (year)	Objective and method	Inference or scoring	Data and evaluation	Contribution and limitation	Relevance to this project
[6] Zhang et al. (2024); conference	Survey of integrating logics (rules, ontological schemas) with embeddings	Not applicable (survey)	Not applicable	Rule measures such as confidence and head coverage may mislead under incomplete, noisy KGs. *Stated:* few methods support general ontological schemas	Positions rules and schemas as the interpretable side (G3, G4, G6)
[7] Wang et al. (2026); journal	Inductive completion with ontology semantics in subgraph reasoning and prompts	Neural subgraph scoring with ontology features	Inductive subsets of WN18RR, FB15k-237, NELL-995	Better than baselines, particularly in few-shot settings. *Stated:* generalisation to unseen relations not systematically evaluated	Shows ontology semantics can enter KGC (G3)
[8] Lv et al. (2018); conference	Distinguish concepts and instances in embeddings	Geometric containment of instances in concept spheres	YAGO-based data; link prediction, triple classification	Captures transitivity of instanceOf and subClassOf. *Own:* requires explicit concept hierarchies, which CoDEx-M lacks	Contrast with the untyped CoDEx-M ontology (G3)
[9] Balakrishnan et al. (2025); conference	Semantic interoperability of multi-centre healthcare data with ontologies	Not applicable	Not reported in the abstract	Supports consistent interpretation across institutions. *Own:* not a link-prediction method	Why ontologies check semantic consistency (G3)
This project	RDF/OWL TriG with train, labels and provenance named graphs	Not used in the score	185,584 train + 51,303 label + 23 provenance triples	Lossless, verified representation. *Limit:* no semantic constraint applied	Built; ontology-aware scoring planned

3.7 Explainable knowledge graph inference

Grouping criterion: papers that make the justification of a prediction a design goal. Rule-based methods can trace a prediction to its rule [1, 12]. The explainable path reasoning framework of Yu et al. [10] mines paths, scores candidates with a BERT-based encoder and builds multi-hop explanations by beam search; its authors report that two- or three-hop paths are often sufficient and that interpretability is limited in sparse regions. Li et al. [11] discuss knowledge graphs as a basis for transparent, responsible AI. The implemented explanation stores, for every prediction, all supporting rules with their statistics and every body grounding (11,059 groundings for the 3,239 cap-100 predictions), and the prediction explorer draws them as a subgraph (Figure 5.8). It is of the same kind as a short path explanation but produced by counting, without a language model, and it has not been evaluated with users.

Table 3.7: Comparative review of existing research approaches: explainable knowledge graph inference.

Paper (year)	Objective and method	Inference or scoring	Data and evaluation	Contribution and limitation	Relevance to this project
[10] Yu et al. (2026); journal	Explainable path-based completion	BERT path scoring; beam search	Not extracted	Competitive among explainable methods, narrower gap to black-box models. *Stated:* offline path mining gives a decoupled pipeline without end-to-end optimisation	Supports explaining a candidate by its supporting paths (G4, G5)
[11] Li et al. (2025); magazine	KGs for transparent, responsible AI	Not applicable	Not applicable	Research opportunities and challenges. *Own:* position paper	Motivation for auditable reasoning (G4)
This project	Rules, statistics and every grounding stored per prediction; explorer	Not applicable	Explanations exist by construction	Path-level explanations. *Limit:* not evaluated with users	Implemented

3.8 Neural-symbolic reasoning and differentiable rule learning

Grouping criterion: papers that learn rule structure or rule weights with gradient-based, probabilistic or neural methods. Neural LP [12]† learns rule structure and confidences jointly with a differentiable formulation built on TensorLog operators; on FB15KSelected (14,541 entities, 237 relations, 20,466 test triples) it reports MRR 0.24 and Hits@10 36.2%. RNNLogic [13] treats rules as latent variables optimised with an EM algorithm and shows that rules and embeddings are complementary; NCRL [14] learns compositional rules end to end and is reported to train about 100 times faster than other rule learners; logical neural networks [15] learn rules with embeddings (scalability is a stated limitation); and R-CQA [16] injects rules into complex query answering. These methods learn rule selection or weights and are evaluated by filtered ranking. The implemented system selects rules by thresholds on counts and reports exact-set metrics, so none of these results is comparable with this project's numbers.

Table 3.8: Comparative review of existing research approaches: neural-symbolic reasoning and differentiable rule learning.

Paper (year)	Objective and method	Inference or scoring	Data and evaluation	Contribution and limitation	Relevance to this project
[12]† Yang et al. (2017); conference	Learn rule structure and confidences jointly (differentiable)	Sum of learned rule confidences; chain rules	UMLS, Kinship, WN18, FB15K, FB15KSelected, WikiMovies; filtered MRR, Hits@10	FB15KSelected: MRR 0.24, Hits@10 36.2%. *Own:* no limitations section	Rule confidence as an explicit, interpretable quantity; short rules suffice (G1, G4)

Paper (year)	Objective and method	Inference or scoring	Data and evaluation	Contribution and limitation	Relevance to this project
[13] Qu et al. (2021); conference	Probabilistic rule learning; rules as latent variables (EM)	Reasoning predictor weights rules	Four datasets incl. FB15k-237; MRR, Hits@k	Effective with few rules per relation. *Stated:* the reasoning predictor is simple; left to future work	Rule selection by learning rather than thresholds (G1, G5)
[14] Cheng et al. (2023); conference	Scalable end-to-end compositional rule learning	Learned scores of composed rules	Large KGs incl. FB15k-237; MRR, Hits@k, training time	About 100 times faster training than rule learners; systematic generalisation. *Own:* limitations not found in the extracted text	Benchmark for rule-learner scalability (G5, G7)
[15] Sen et al. (2022); conference	Logical neural networks with embeddings and rules	Learned rule weights	English benchmarks; MRR, Hits@k	About 10% relative gain over rule-based methods, a further 7.5% with embeddings. *Stated:* larger KGs need more GPU resources	Rule–embedding combination keeps rules interpretable (G5)
[16] Zhang et al. (2025); conference	Inject rules into complex query answering	Embedding query scores with rule injection	Not extracted	Rule injection improves base models. *Own:* targets complex queries, not single edges	Rules carry useful background knowledge (G3)
This project	Thresholds on support, PCA confidence, head coverage and lift	Counted statistics	Exact-set metrics only	Transparent and cheap. *Limit:* no learned rule selection; not comparable	Not implemented

3.9 Knowledge graph embeddings and link prediction

Grouping criterion: papers whose principal method is a vector-space scoring function for triples. Embeddings are the main alternative to rule-based completion and the natural baselines for later comparison; they rank all entities but give no supporting facts for an individual prediction. The families differ in how a relation acts on entities: translations [20–23], bilinear or complex factorisation [17,18], and rotations [19]. DistMult also shows that Horn rules can be mined from learned embeddings [17], and RotatE's relation composition corresponds to the two-atom chain rules mined here [19]; its symmetry and inversion patterns correspond to the symmetry and inverse rules (for example spouse and sibling) that produce most of this project's test matches. No embedding model is implemented in this project. Table 3.9, at the end of Section 3.11, compares these approaches with the proposed one.

3.10 Graph neural networks and advanced learning methods

Grouping criterion: papers that learn from graph neighbourhoods, paths or subgraphs. GNN completion models aggregate neighbour, edge or text information [25–27] or model query-related paths and subgraphs at several granularities [24], and the reviews [28,29] place them among graph learning methods; [30–32] apply neural reasoning to multi-hop queries and industrial settings.

They can use local evidence, which a global rule score lacks, but need training and are less transparent; they are not implemented here.

3.11 Knowledge graph surveys, benchmarks and evaluation

Grouping criterion: surveys, reviews and papers that define the benchmarks, protocols and assumptions used to assess completion. Liu et al. [33] group reasoning into ontology-based, rule-based, neural-rule and hybrid methods, Niu et al. [34] state that reasoning follows the open-world assumption, and Ji et al. [36] report studies of probability calibration. Li et al. [35] list CoDEx, with its small, medium and large variants, among Wikidata-derived completion benchmarks. The embedding surveys classify models by information used, representation space, structure and literals [37–39, 41, 42]; the selected survey of Cao et al. [39]† organises models by algebraic, geometric and analytical representation spaces and collates results from downstream tasks, which is the basis for choosing embedding baselines later. Biswas et al. [40] note that most techniques are assessed on human-curated link-prediction benchmarks. Ranking-based papers report filtered MRR and Hits@k [4, 12]; SLogic also handles tied scores, because a naive ranking of a rule-based system can assign a good rank when no rule applies [4]. Zhang et al. question the silver-standard correctness of benchmark evaluation [6]. These points justify the protocol of this project: exact-set metrics with unlabelled predictions treated as unknown, no MRR or Hits@K until a valid ranking protocol exists, and a documented separation of validation and test use.

Table 3.9: Comparative review of existing research approaches: embeddings, graph neural networks, surveys, benchmarks and evaluation.

Papers	Method and contribution	Data and evaluation	Limitation	Relevance to this project
[17,18]	Bilinear (diagonal) and complex-valued factorisation; DistMult reports top-10 accuracy 73.2% against 54.7% for TransE on Freebase and mines Horn rules from embeddings; ComplEx handles symmetric and antisymmetric relations	Freebase; standard link-prediction benchmarks	*Own:* no supporting facts for one prediction	Baseline family; rules can be mined from embeddings (G1)
[19]	Relations as rotations in complex space; symmetry, antisymmetry, inversion and composition; self-adversarial negative sampling	Link-prediction benchmarks	*Own:* composition is geometric, not explicit	Composition and symmetry correspond to mined rules; baseline
[20–23]	Translations of entity embeddings (TransE), refined with hyperplanes, relation-specific spaces or relational mapping properties	Link prediction; triple classification	1-to-N, N-to-1 and N-to-N relations are hard for TransE	Baseline family; mapping properties relate to candidate explosion (G5)
[24–27]	GNN completion: multi-granularity paths and subgraphs (MulGA), edge-aware aggregation (ERA-GCN), embedding-based GCN, text semantics (SEGCN)	FB15k-237, WN18RR and others; MRR, Hits@k	*Own:* neural, less transparent; abstract-level reading	Local evidence (G2); later baselines

Papers	Method and contribution	Data and evaluation	Limitation	Relevance to this project
[28,29]	Surveys of GNNs for KGs and of GNN architectures	Not applicable	*Own:* general background	Context for neural alternatives
[30–32]	Multi-hop logical queries on multi-modal KGs; process KG reasoning; industrial fault prediction	Application datasets	*Own:* domain-specific	Application motivation
[33–36]	Surveys of reasoning and completion: ontology, rule, neural and hybrid groups; OWA; calibration; CoDEx listed as a benchmark	Not applicable	*Own:* surveys, no new method	Context; OWA; calibration (G6)
[37–39]†, [40–42]	Surveys of embedding techniques by information, representation space, structure and literals; benchmark critique	Not applicable	*Own:* embedding-focused	Baseline selection; evaluation limits (G6)
[43]	Temporal reasoning: representation learning versus transparent symbolic rules	Not applicable	*Own:* temporal setting	Interpretability trade-off
This project	Embeddings and GNNs not implemented; exact-set benchmark precision, recall, F1 and positive hit rate; unlabelled predictions unknown	CoDEx-M splits with supplied negatives	No MRR or Hits@K; no baseline; test split used twice	Baselines and ranking protocol planned

3.12 Development of the field

Table 3.10 orders the main reviewed approaches by publication year. It shows how the field moved from vector-space scoring to explicit rules and, more recently, to combinations of rules, neural models and ontology semantics. The order of publication is not the order of relevance used in the rest of the section.

Table 3.10: Development of the main reviewed approaches by year.

Year	Approach	Main idea
2013–2016	Translation and factorisation embeddings [17, 18, 20–23]	Relations as translations, projections or factorisations of entity vectors; scalable but without supporting facts
2017	Neural LP [12]†	Differentiable learning of rule structure and confidence
2018	TransC [8]	Concepts as spheres and instances as vectors
2019	RotatE [19]	Relations as rotations; symmetry, inversion and composition
2021	RNNLogic [13]	Rules as latent variables learned with EM
2022	Evoda [2]†, logical neural networks [15]	Genetic rule search with PCA confidence; neural learning of rules
2023	NCRL [14]	Compositional rules learned end to end
2024	AnyBURL [1]; Cao et al. survey [39]†	Scalable bottom-up rule learning; representation-space view of embeddings
2025	SLogic [4]†, probabilistic circuits [5]†	Query-dependent rule scores; probabilistic combination of rules
2026	OneSRPL [7], EPR [10]	Ontology semantics inside neural reasoning; explainable path reasoning

3.13 Common limitations and open challenges

Across the themes, the reviewed papers share five limitations (LQ4). Each is linked to a gap in Table 3.11.

C1: Global rule confidence. Most rule learners give each rule one confidence for the whole graph [1,2,12]. Query-dependent scores exist, but they need neural training [4] (G1, G2).

C2: Ontology knowledge outside the score. Ontology semantics enter completion mainly inside neural models [7, 8], and few methods support general ontological schemas [6] (G3).

C3: Explanations that are produced but not evaluated. Rules and paths explain predictions [1, 10, 12], but the explanations are rarely tested with users, and integrated logic-and-embedding methods often remain opaque [6] (G4).

C4: Coverage and scale. Short rules miss facts that need longer patterns, while longer rules and hub entities create very many candidates [1,5,14] (G5, G7).

C5: Evaluation under an incomplete graph. Filtered ranking metrics dominate, tied scores can make rule-based rankings optimistic [4], benchmark correctness is questioned [6], and an unmatched prediction is unknown rather than false [34] (G6). Because datasets, splits and metrics differ, the published numbers in this review are not directly comparable with each other or with this project.

3.14 Trends and key lessons

Four lessons shape the design of this project. First, explicit rules give explanations that embeddings do not, and compact rule sets can match larger ones [1,5], so a small, transparent rule language is a defensible starting point. Second, how a rule is scored matters as much as which rules are found: the standard confidence is questioned for incomplete graphs [2,6], and query-dependent scores improve results at the cost of training [4]. Third, ontology semantics help when they are integrated into the model, but they have so far been used mainly inside neural systems [7], which leaves a simple, count-based use open. Fourth, evaluation under an incomplete graph needs care: ranked metrics need a defined candidate universe and a tie policy [4], and a non-match is unknown, not false [34].

3.15 Research gap analysis

Table 3.11 lists the gaps that the literature supports. For each it names the papers that address it, what remains open, and the status in this project: *addressed* means implemented and measured in this report, *partly* means implemented in a limited form, and *planned* means not implemented.

Table 3.11: Research gap analysis: gaps supported by the literature and their status in this project.

ID	Gap	Support	Addressed in the literature; what remains	This project	Status
G1	Global rule confidence	[1,2,4,6]	Query-dependent scores and PCA confidence exist; standard confidence is questioned under incomplete data	PCA confidence with a Wilson lower bound per rule; one value per rule; not calibrated	Partly
G2	Candidate-specific evidence	[4,5]	Subgraph evidence and probabilistic combination exist; costly or neural	Distinct body matches computed for all 184,487 candidates but used only as V2 tie-break	Partly

ID	Gap	Support	Addressed in the literature; what remains	This project	Status
G3	Ontology-aware scoring	[6–8]	Few methods support ontological schemas; integration is inside neural models	RDF/OWL dataset generated; no domain/range or class axioms; not used in mining or scoring	Planned
G4	Explainability	[4, 6, 10, 12]	Rules and paths explain predictions; explanations rarely evaluated	All rules and groundings per prediction; explorer; no user evaluation	Addressed (path level)
G5	Scalability and candidate volume	[1,4,5,14]	Fewer rules, coverage penalties and scalable learners	6 hub bodies over 5M paths skipped; per-relation caps 100–1,000 compared on validation	Partly
G6	Evaluation in an incomplete graph	[2,4,6,34]	PCA confidence, OWA, tie handling, benchmark critique	Unlabelled predictions unknown; benchmark precision over labelled predictions; no MRR/Hits@K; test used twice	Partly
G7	Rule coverage	[1, 10, 14]	Longer rules and paths raise coverage	One- and two-atom rules only; 11 test relations have no prediction; recall ceiling 71.97% at cap 1,000	Partly

Synthesis. Rule discovery and confidence estimation are well studied but mostly global: AnyBURL, Evoda and Neural LP assign each rule one value [1, 2, 12]; SLogic and the circuits paper make evidence candidate-specific or combine it jointly at the cost of training [4, 5]; and ontology semantics enter completion only inside neural models [7]. What remains open is a transparent, count-based candidate score that combines rule reliability with candidate-specific evidence and a semantic-consistency check, evaluated under the open-world assumption with a valid ranking protocol. The project addresses part of this: it implements an explainable rule pipeline with PCA confidence, Wilson bounds and full groundings (G4), measures the effect of an evidence tie-break (G2) and of per-relation caps (G5) under an open-world protocol (G6), and builds the ontology. Ontology-aware scoring, evidence inside the score, longer rules, ranked evaluation and baseline comparison are proposed future work, and the project does not claim novelty or superiority over the reviewed methods.

4 Project Overview

4.1 Problem statement

The project **Confidence-Aware Ontology-Based Inference for Missing Edge Prediction in Knowledge Graphs** studies rule-based completion on the **CoDEx-M** benchmark. Given an incomplete knowledge graph G (here the CoDEx-M training split), the task is to propose missing triples that are absent from G, to give each proposal a score that reflects the reliability of the rules that support it, and to explain each proposal by the training facts that produce it. A rule $B(x, z) \Rightarrow h(x, z)$ with a body of one or two atoms is mined from G with its support, standard confidence, PCA confidence, head coverage and Wilson lower bound; applying the rule to G yields candidates $h(x, z) \notin G$. Each candidate is ranked by the best Wilson lower bound of its rules, ties are broken by a documented order (V1 or V2), a per-relation cap limits the number kept, and the kept predictions are evaluated against held-out positives and supplied negatives under the open-world assumption.

The limitations that define the scope of the problem are verified in Section 6: candidate explosion around hub entities (six body shapes exceed five million paths; 184,487 unique candidates for 33 relations), ties that make the cap decide by entity ID at cap 100 (31 of 32 capped relations in V1), a global per-rule score, limited coverage (11 relations with test positives receive no prediction), open-world uncertainty (most predictions are unlabelled), and an ontology that is not yet used in scoring.

4.2 Objectives

The project has seven objectives for the current stage. Each has a planned extension that is future work and is not claimed as done (Table 4.1).

Table 4.1: Objectives, status, evidence and planned extensions.

ID	Objective	Status	Evidence (repository)	Future extension (not done)
O1	Inspect and verify the CoDEx-M splits	Completed	Dataset inspection report: counts, format, zero overlap	–
O2	Construct a relation-labelled training graph	Completed	17,050 nodes, 185,584 edges; GraphML, statistics, viewer	–
O3	Generate an RDF/OWL ontology representation	Completed; not used in scoring	TriG with 3 named graphs; reload and allowlist checks passed	Verified schema; ontology-aware scoring with ablation
O4	Mine and review logical rules	Completed	194 rules in the extended run; 160 frozen after the validation review	Longer rules, constants, object identity
O5	Generate, score and rank candidate edges	Completed	184,487 candidates; V1 and V2 rankings; caps 100–1,000	Evidence inside the score; calibration
O6	Explain and explore predictions	Completed; not user-tested	Prediction explorer with provenance; cap-comparison dashboard	User evaluation
O7	Evaluate with a documented protocol	Completed	Phase 6 test evaluation; validation-based cap selection; final test	Ranking protocol (MRR, Hits@K); baselines

4.3 Original proposal and its realisation

The project abstract proposed a pipeline in which an ontology is built from the knowledge graph, transformed into logical rules, applied by an inference engine to derive candidate missing edges, and scored by a confidence that combines the reliability of the rule, supporting evidence, the strength of relationship paths and consistency with the ontology; candidates would be ranked and evaluated with precision, recall, F1, MRR and Hits@K. Table 4.2 compares each element with what is implemented, so that the report does not claim more than the code does.

Table 4.2: Elements of the original proposal compared with the implementation.

Element of the proposal	Status	What the implementation does
Ontology built from the knowledge graph	Implemented	RDF/OWL TriG dataset: training assertions, labels and provenance in separate named graphs
Ontology transformed into logical rules	Not as proposed	Rules are mined from the training named graph's triples; no ontology axiom is used to create them
Inference engine derives candidate edges	Implemented	One round of 160 frozen rules over training facts; training triples and duplicates removed

Confidence from rule reliability	Implemented	PCA confidence and its Wilson lower bound per rule; best rule gives the score
Confidence from supporting evidence	Partly	Distinct body matches counted for every candidate; used as V2 tie-break only
Confidence from path strength	Planned	Not implemented
Confidence from ontology consistency	Planned	Not implemented
Ranking of candidates	Implemented	Per-relation ranks (V1, V2) and caps 100, 250, 500, 1,000
Precision, recall, F1	Implemented	Exact-set benchmark metrics on validation and test, plus positive hit rate
MRR and Hits@K	Planned	Requires a per-query ranking protocol with a defined candidate universe

4.4 Scope and expected contribution

The scope of the current stage is a complete, reproducible rule-based completion baseline on one benchmark, with an evaluation protocol that keeps the test split for final checks and treats unlabelled predictions as unknown. The expected contribution is (i) a thematic, comparative review of 43 papers with a research-gap analysis; (ii) an explainable pipeline whose every prediction carries its rules and training groundings; (iii) a measured comparison of two tie-break policies and four cap sizes, selected on validation with a rule frozen in advance; and (iv) documented limitations that define Phase 2: ontology-aware and evidence-aware scoring, ranked evaluation and baseline comparison. Neural or embedding baselines, user studies and ontology semantics in the score are outside the current scope.

4.5 Research questions

Three questions guide the evaluation; Section 6 answers them with the verified results.

- **RQ1. How much of the held-out data can one- and two-atom rules recover under a per-relation cap?** Section 6.6.
- **RQ2. Does candidate-specific evidence, used as a tie-break, improve the ranking?** Sections 6.4 and 6.5.
- **RQ3. What is the trade-off when the cap grows, and what limits the approach?** Sections 6.5 and 6.7.

4.6 Comparative analysis

Section 3 compares the approach with the published ones theme by theme (Tables 3.4–3.9); the last row of each table summarises the position of this project. Published results on FB15k-237-type data use filtered ranking over all entities: Neural LP reports MRR 0.24 and Hits@10 36.2% on FB15KSelected [12], and SLogic reports MRR 0.30 and Hits@1 21.9% on FB15k-237 [4]. This project reports exact-set metrics on CoDEx-M against supplied positives and negatives. The two kinds of number differ in dataset, candidate universe, negatives and metric, so they are *not comparable*, and superiority is not claimed.

5 Proposed Methodology and Architecture

5.1 Published approaches and the conceptual pipeline

Rule-based missing-edge prediction in the literature follows a common conceptual pipeline: rule discovery, rule confidence estimation, candidate generation, candidate scoring, optional ontology integration, explanation generation and evaluation. Table 5.1 shows how the most relevant published approaches realise each stage and where the implemented system stands. The rows for published methods are literature-derived; only the last row describes code that was run in this project.

Table 5.1: Conceptual pipeline stages in published approaches and in the implemented system.

Approach	Rule discovery	Confidence	Candidate generation	Candidate scoring	Ontology	Explanation	Evaluation
AnyBURL [1]	Path sampling, generalisation	Standard, sampled	Rule application	Maximum confidence	–	Rule per prediction	Filtered MRR, Hits@k
Evoda [2]†	Genetic search	PCA confidence	Rule application	Rule confidence	–	Rule	Hits@k, MRR
SLogic [4]†	Simple paths	GNN, query-dependent	Rule application	Learned	–	Rule	Filtered MRR, Hits@k
Circuits [5]†	AnyBURL rules	Circuit probability	Rule application	Joint probability	–	Rule set	Filtered Hits@k, MRR
Neural LP [12]†	Differentiable	Learned	Operator chains	Sum of confidences	–	Rule	Filtered MRR, Hits@10
OneSRPL [7]	–	–	Subgraphs	Neural	Ontology features	–	Inductive ranking
EPR [10]	Path mining	–	Paths	BERT encoder	–	Multi-hop path	Ranking
This project	Exhaustive 1–2 atom rules	PCA conf. + Wilson bound	Rule application, one round	Max Wilson; V1/V2 ties; caps	Built, not in score	All groundings	Exact-set; OWA labels

5.2 Architecture of the implemented system

Figure 5.1 shows the architecture of the implemented system as seven blocks. It was drawn from the source code. The training split feeds graph and ontology construction, rule mining and candidate generation. The validation split is used in two places: to review the mined rules and to select the cap and ranking version. The test split is used only for evaluation. The RDF/OWL representation is generated from the training data, but no ontology semantics influence the prediction score. Planned extensions are shown separately as future work.

5.3 Workflow pipeline

The architecture shows *what* the system contains; the workflow in Figure 5.2 shows the *order* in which the operations were run. In the project the stages are grouped into six phases: dataset inspection (Phase 1), graph construction (Phase 2), ontology generation (Phase 3), rule mining (Phase 4), candidate generation and ranking (Phase 5) and test evaluation (Phase 6), followed by the cap experiment. After the dataset is inspected, stages 3–7 use training facts only: the training graph and the RDF/OWL representation are built, rules are mined (and then reviewed on the validation split), candidate triples are generated and ranked with V1 and V2. The cap-100 V1 and V2 predictions were evaluated on the test split at this point, before the cap experiment was designed. The cap was then chosen on the validation split, and only the selected configuration (cap 1,000, V2) was evaluated on the test split. The results are shown in the prediction explorer and the cap-comparison dashboard.

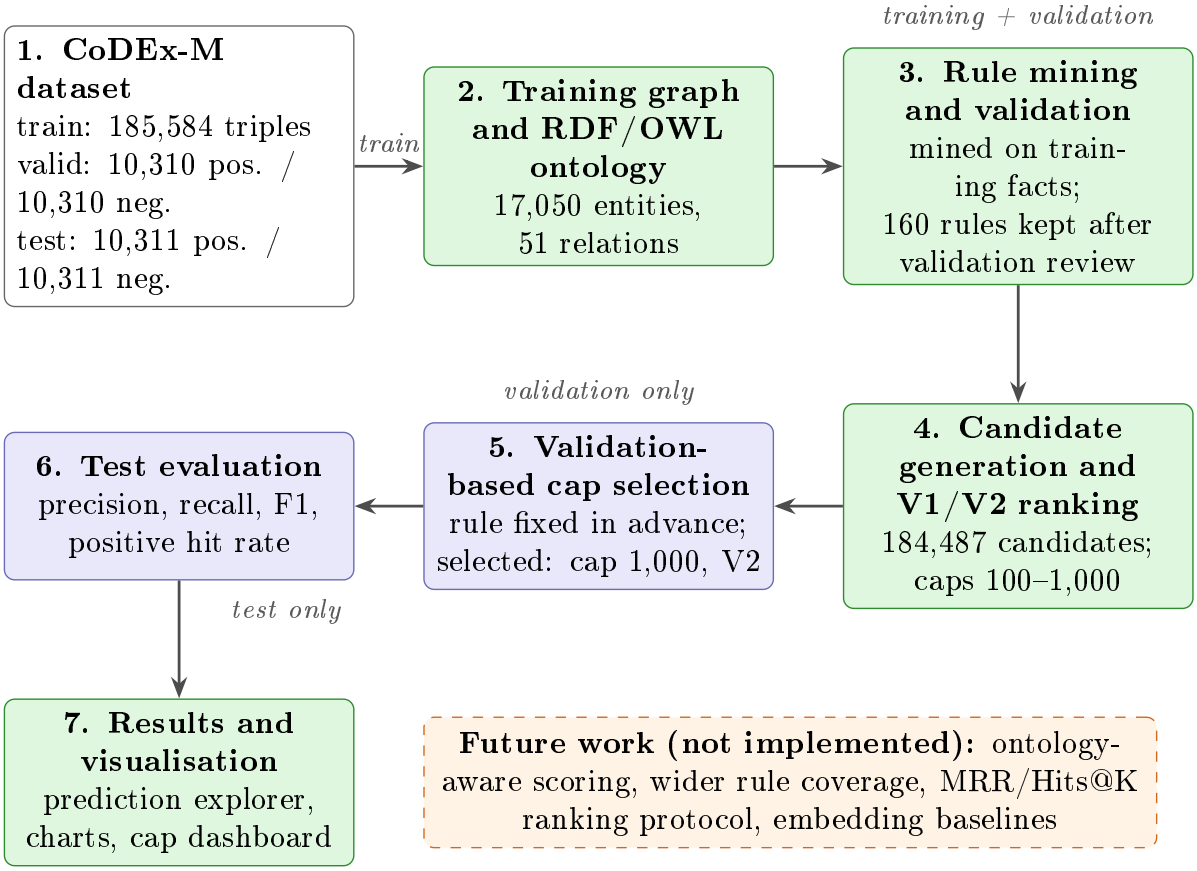


Figure 5.1: Architecture of the Proposed Rule-Based Knowledge Graph Completion System Using CoDEx-M. Green: implemented stages that use training data (block 3 also uses validation for the rule review); blue: stages that use held-out data; dashed orange: planned future work. The test split was used twice, first for the cap-100 baseline and later for the selected cap-1,000 V2 configuration.

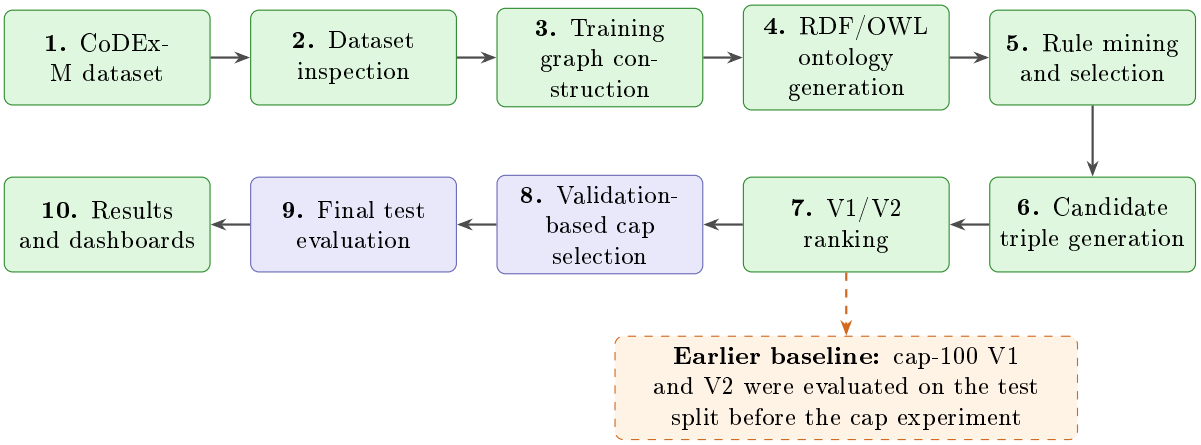


Figure 5.2: Workflow pipeline of the project. Green: stages on training data (stage 5 also reviews rules on validation); blue: validation-based selection and final test; dashed orange: the earlier cap-100 test baseline.

5.4 Data and splits

CoDEx-M [44] is a Wikidata-derived completion benchmark whose entities and relations keep their Wikidata identifiers (Q..., P...). The five local files were inspected in Phase 1 (Table 5.2). Every row parsed as three tab-separated IDs, there were no duplicates, malformed rows or

unmapped IDs, and no positive triple is shared between any two positive splits. The supplied negative files have as many rows as their positive splits, contain no positive triple, and were checked structurally only; their semantic validity was not assessed. The label files `entity_labels.json` and `relation_labels.json` are used for display only.

File	Triples	Entities	Relations	Use in the pipeline
`train.txt`	185,584	17,050	51	Graph, ontology, rules, candidates
`valid.txt`	10,310	9,124	45	Rule review; cap selection
`valid_negatives.txt`	10,310	4,990	43	Rule review; cap selection
`test.txt`	10,311	9,137	43	Final evaluation only
`test_negatives.txt`	10,311	4,972	43	Final evaluation only

Table 5.2: CoDEx-M files, verified from `outputs/phase1_dataset_report.md`. Entities and relations are those occurring in each file.

5.5 Graph construction and visualisation

The graph builder reads only the training split. It creates a directed multigraph in which each unique triple is an edge labelled with its relation ID, so two entities can be linked by several relations. The graph has 17,050 nodes and 185,584 edges. The builder also saves graph statistics (relation frequencies and two-hop path counts), a record of its filtering decisions (no rows were removed), and an offline interactive viewer. The relation distribution is very skewed (Figure 5.3): occupation (P106) alone has 64,345 training triples, while eight relations have fewer than 20.

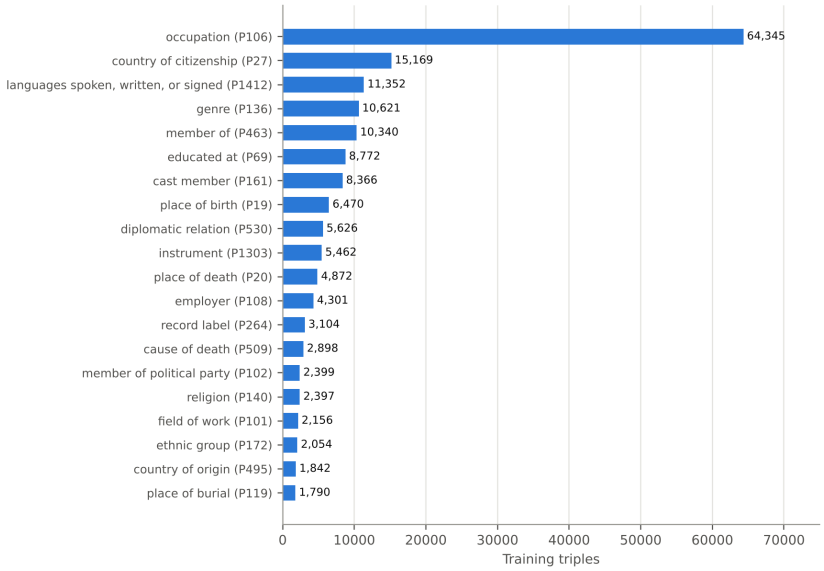


Figure 5.3: The 20 most frequent relations in the CoDEx-M training graph (from the saved graph statistics).

The interactive viewer contains the complete training graph and draws only a bounded neighbourhood or relation subgraph at a time. Figure 5.4 shows the one-hop neighbourhood of Katherine Jackson (Q238402): 15 training triples, one incoming (spouse, from Joe Jackson) and fourteen outgoing (nine child, two occupation, one each for language, ethnic group and citizenship). This entity is used again in the worked example of Section 5.9.

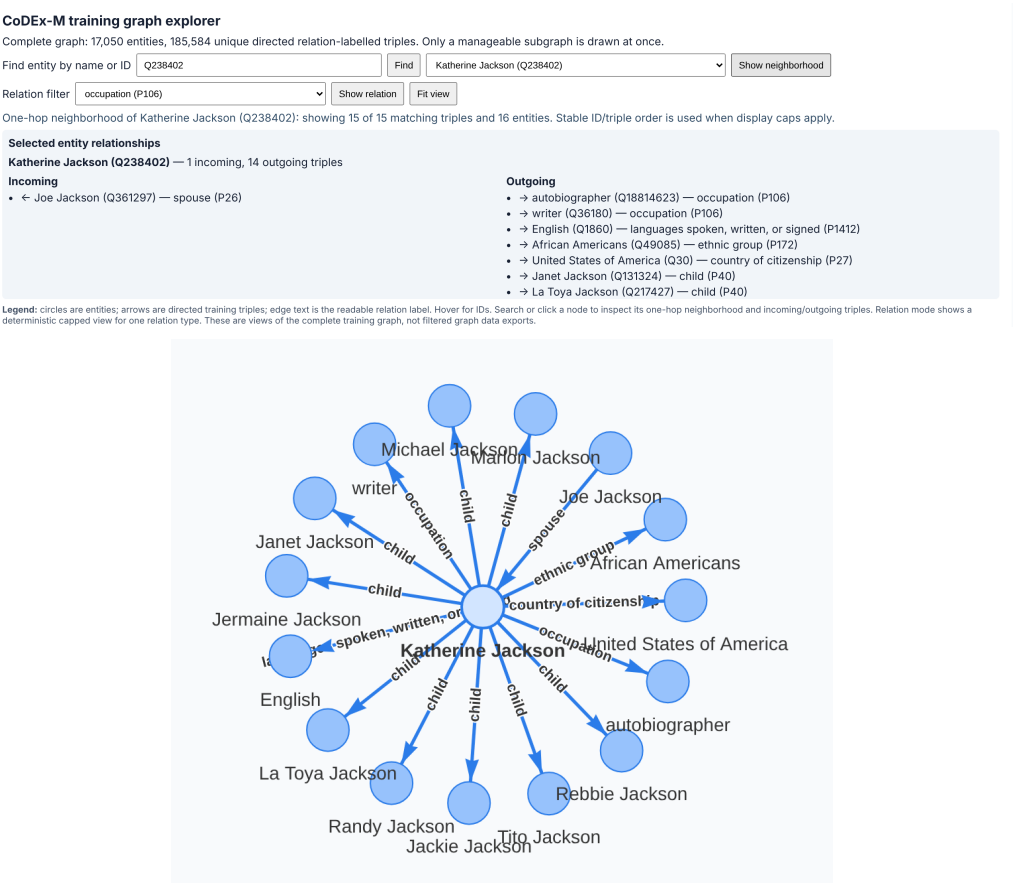


Figure 5.4: Screenshots of the training-graph viewer: entity search and relationship panel (top) and the drawn one-hop neighbourhood of Katherine Jackson (bottom). Only training triples are shown.

5.6 RDF/OWL ontology generation

The ontology builder converts the training triples and the two label maps into an RDF dataset in the TriG format (20.5 MB). Each entity and relation keeps its Wikidata-style ID inside a project namespace (for example `urn:codexm:entity:Q238402`). The dataset has three named graphs:

- **train** – exactly the 185,584 training triples, with no labels or types;
- **labels** – 51,303 triples: an English label and the source ID of each entity and relation, and the generic declarations `owl:NamedIndividual` (entities) and `owl:ObjectProperty` (relations);
- **provenance** – 23 triples describing the source file, the counts and the converter version.

No domain, range, inverse, symmetry, transitivity or class axioms are declared. CoDEx-M supplies no verified entity types or relation constraints, and a relation label that sounds symmetric is only a hypothesis. After writing the file, the builder reloads it and checks that the training graph equals the source triples, that every ID can be recovered, and that only the allowed declarations occur. Table 5.3 lists genuine triples from the dataset, and Figure 5.5 draws the same triples by named graph.

Table 5.3: Genuine triples from the RDF/OWL dataset (namespace prefixes shortened).

Named graph	Subject	Predicate	Object

train	entity:Q238402 (Katherine Jackson)	relation:P27	entity:Q30 (United States of America)
train	entity:Q238402	relation:P40 (child)	entity:Q131324 (Janet Jackson)
train	entity:Q361297 (Joe Jackson)	relation:P26 (spouse)	entity:Q238402
labels	entity:Q238402	rdf:type	owl:NamedIndividual
labels	entity:Q238402	rdfs:label	“Katherine Jackson”@en
labels	relation:P26	rdf:type	owl:ObjectProperty
labels	relation:P26	rdfs:label	“spouse”@en
provenance	dataset:train	vocab:uniqueTripleCount	185584

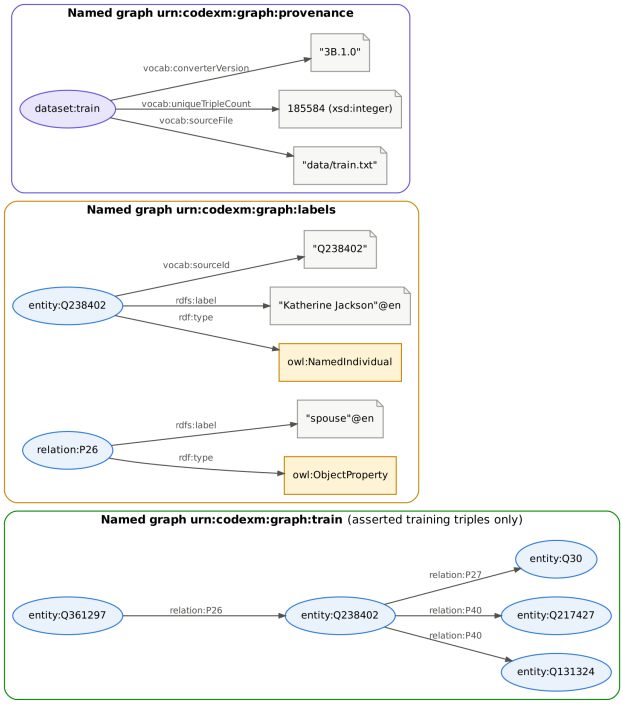


Figure 5.5: The triples of Table 5.3 drawn by named graph. The training assertions are kept apart from labels and provenance, so the rule miner can select them explicitly.

5.7 Rule mining and validation review

The rule miner reads only the training named graph of the RDF dataset. It enumerates five rule shapes over relation IDs (one-atom symmetry $p(z,x) \Rightarrow p(x,z)$, inverse $p(z,x) \Rightarrow q(x,z)$ and subrelation $p(x,z) \Rightarrow q(x,z)$; two-atom chains $p_1(x,y) \wedge p_2(y,z) \Rightarrow h(x,z)$ and chains with reversed atoms), for the 43 head relations with at least 20 training triples. Of 10,506 body shapes, 7,296 do not join and 3,204 are evaluated; six bodies through hub entities exceed the limit of five million paths and are skipped (for example $\mathrm{P106}(x,y) \wedge \mathrm{P106}(z,y)$, “shares an occupation”, with 96,828,205 paths).

For a rule $R : B(x,z) \Rightarrow h(x,z)$ over the training graph G, counts are taken over distinct pairs:

$$\mathrm{supp}(R) = |\{(x,z) \in \mathrm{Body}(R) : h(x,z) \in G\}|, \qquad \mathrm{conf}(R) = \frac{\mathrm{supp}(R)}{|\mathrm{Body}(R)|}, \tag{5.1}$$

$$\mathrm{pca}(R) = \frac{\mathrm{supp}(R)}{|\{(x,z) \in \mathrm{Body}(R) : \exists z'.\, h(x,z') \in G\}|}, \qquad \mathrm{hc}(R) = \frac{\mathrm{supp}(R)}{|\{(x,z) : h(x,z) \in G\}|}, \tag{5.2}$$

where the PCA side (subject or object) is chosen per head relation. With $p = \mathrm{pca}(R)$, n the PCA body size and $z = 1.96$, the Wilson lower bound is

$$W(R) = \frac{p + \frac{z^2}{2n} - z\sqrt{\frac{p(1-p)}{n} + \frac{z^2}{4n^2}}}{1 + \frac{z^2}{n}}. \tag{5.3}$$

Recomputing Equation (5.3) from the saved counts reproduces the stored values (for example 335/354 gives 0.9177 for spouse symmetry). For swap-invariant rules (symmetry and shared-subject or shared-object bodies) one unordered couple $\{x, z\}$ is one counting unit, so a pair and its reverse are not counted twice. Candidates must pass minimum support, PCA-body size, head coverage, PCA confidence and lift (confidence over the head prior), and redundant or dominated rules are removed; a 90/10 split of the training data checks stability.

Two mining runs were kept: a first run with 166 rules and an extended run with 194 rules that counts swap-invariant rules per couple. The rules were then scored on the validation split over a grid of PCA and support thresholds. The floor pca ≥ 0.10 and supp ≥ 10 was kept, because looser settings raised validation F1 by less than the agreed margin of 0.01. Six rules were excluded because they were unstable, depended on a single middle entity for all of their support, or used a body relation with fewer than 20 triples. The result is a frozen set of **160 rules** for 33 head relations (67 chains, 70 reversed chains, 17 subrelations, 4 symmetry and 2 inverse rules; 8 use couple counting). Table 5.4 lists genuine rules from this set.

Table 5.4: Genuine rules from the frozen 160-rule set. Supp. = support; Body = body size; Std = standard confidence. Wilson bounds in the set range from 0.079 to 0.957.

Rule (labels)	Supp.	Body	Std	PCA	Wilson
child(y,x) ∧ child(y,z) ⇒ sibling(x,z) [couples]	127	128	0.992	0.992	0.957
spouse(z,x) ⇒ spouse(x,z) [couples]	335	437	0.767	0.946	0.918
child(x,y) ∧ child(z,y) ⇒ spouse(x,z) [couples]	36	39	0.923	1.000	0.904
educated at(x,y) ∧ country(y,z) ⇒ country of citizenship(x,z)	543	695	0.781	0.841	0.810
place of death(x,y) ∧ official language(y,z) ⇒ languages spoken(x,z)	643	960	0.670	0.812	0.783
diplomatic relation(z,x) ⇒ diplomatic relation(x,z) [couples]	2,472	3,154	0.784	0.784	0.770
location of formation(y,x) ∧ country of origin(y,z) ⇒ country(x,z)	24	30	0.800	0.923	0.759
country of citizenship(x,y) ∧ official language(y,z) ⇒ languages spoken(x,z)	7,887	17,201	0.459	0.653	0.644

5.8 Candidate generation, scoring and V1/V2 ranking

The predictor reads the training graph and applies the 160 rules for *one* round, so predictions are never reused as evidence. For every body pair (x, z) with $x \neq z$ it records the rule and all body groundings. Of 212,342 rule×pair records, 65,813 are skipped because the head is already a training triple, and 27,855 duplicates are merged, leaving **184,487 unique candidate triples**. A candidate t supported by rules $\mathcal{R}(t)$ receives

$$\mathrm{score}(t) = \max_{R \in \mathcal{R}(t)} W(R). \tag{5.4}$$

Many candidates share a score because one rule produces them all, so the tie-break order decides which are kept under a cap:

- **V1**: score ↓, max PCA confidence ↓, number of supporting rules ↓, subject ID ↑, object

ID ↑;

- **V2**: score ↓, max PCA confidence ↓, *distinct body matches* ↓, supporting rules ↓, subject ID ↑, object ID ↑.

A body match is one set of training triples that makes a supporting rule's body true for (x, z); matches are deduplicated across rules, recomputed from the training graph for all candidates, and cross-checked against the stored groundings. V2 does not change candidates, scores or provenance; it only reorders equal-score groups. At cap 100, V1 and V2 share 2,830 of their 3,239 predictions and each has 409 that the other lacks.

5.9 Worked examples from the saved results

A recovered test triple. The V2 prediction ranked first for spouse (P26) is (Katherine Jackson, spouse, Joe Jackson). Two rules support it (Figure 5.8): spouse symmetry, grounded by the training triple (Joe Jackson, spouse, Katherine Jackson), and the shared-child rule $\text{child}(x, y) \wedge \text{child}(z, y) \Rightarrow \text{spouse}(x, z)$, grounded by nine shared children. Its score is the higher Wilson bound, 0.918, and it has 10 distinct body matches. The triple is a test positive.

A hub-driven error. The V2 prediction ranked first for country (P17) is (London, country, United States of America), score 0.759, from $\text{location of formation}(y, x) \wedge \text{country of origin}(y, z) \Rightarrow \text{country}(x, z)$: a band formed in London whose country of origin is the USA. The prediction is unlabelled and plausibly false; it shows that a high rule statistic does not establish a fact, and that more proof paths (89 matches here) often come from hub entities.

5.10 Prediction explorer

The prediction explorer is a static web page built from the V1 and V2 predictions, the training graph and the label maps. It does not read the validation or test files. It loads all 3,648 unique predicted triples (6,478 version rows) and loads provenance and training edges per relation and per entity on demand. Its four tabs are a graph view, a sortable prediction table, a V1-versus-V2 comparison and a read-only view of the Phase 6 results. Filters for version, relation, score range, top-N per relation, text and entity apply to every tab. Figures 5.6–5.9 are screenshots of the working interface captured from the project files.

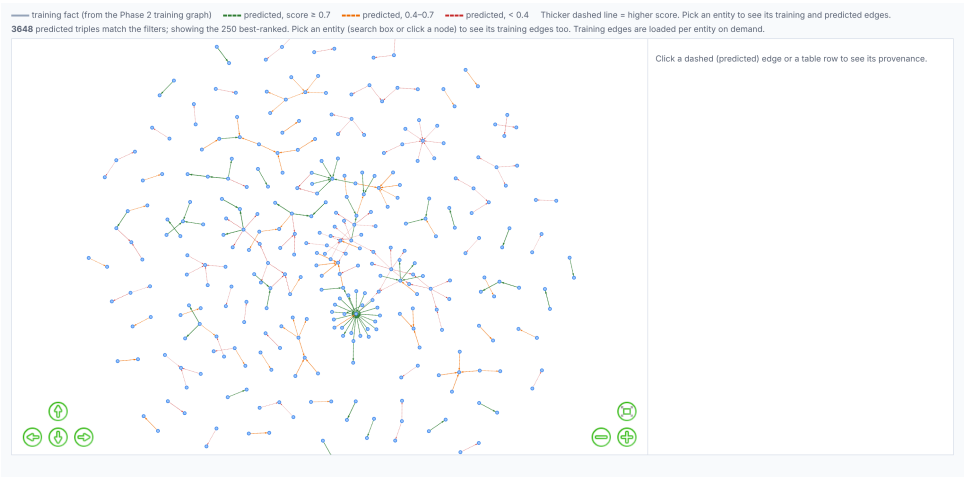


Figure 5.6: Prediction explorer, default graph view: the 250 best-ranked of 3,648 predicted triples; dashed edges are predictions coloured by score band (green ≥ 0.7, orange 0.4–0.7, red < 0.4).



Figure 5.7: Entity search and entity view for Katherine Jackson: 15 training edges (solid) and 2 predicted edges (dashed): spouse → Joe Jackson (score 0.918) and place of burial → Forest Lawn Memorial Park (score 0.377).

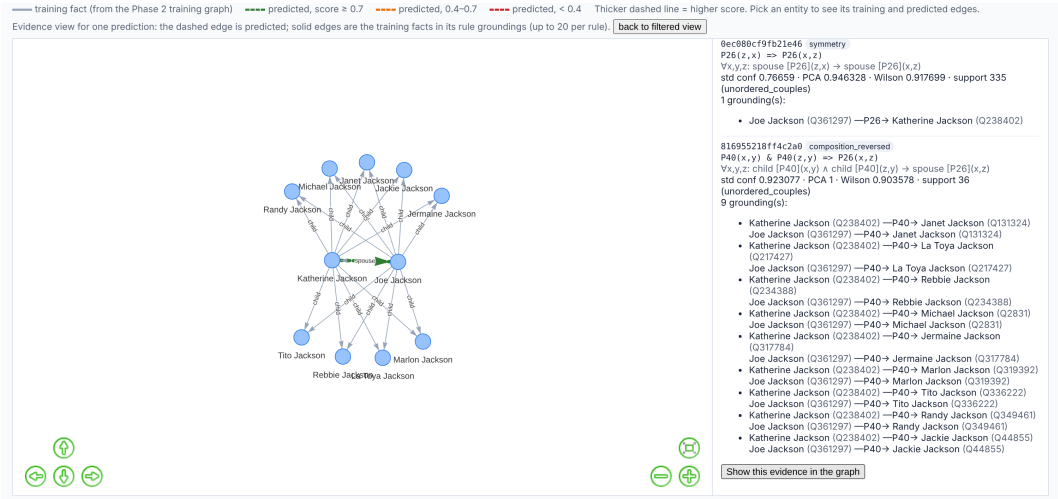


Figure 5.8: Evidence view and provenance panel for the prediction (Katherine Jackson, spouse, Joe Jackson): both supporting rules with their statistics and the training groundings drawn as solid edges.

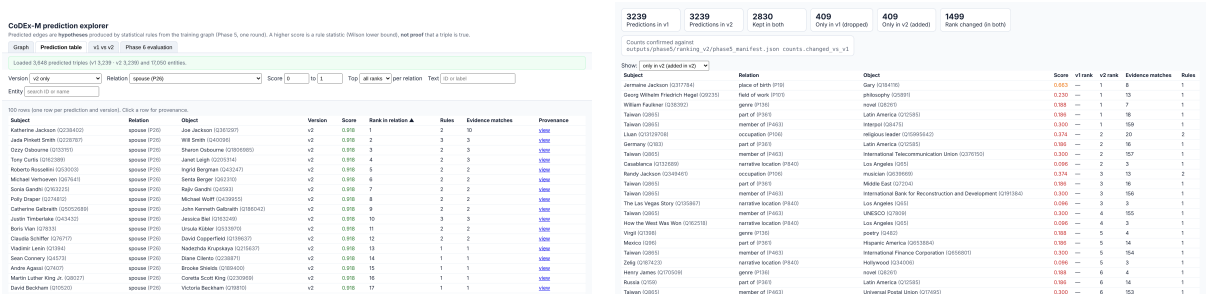


Figure 5.9: Prediction table filtered to V2 and spouse (P26), sorted by rank (left), and the V1-versus-V2 comparison tab showing 2,830 predictions kept in both, 409 dropped, 409 added and 1,499 with a changed rank (right).

5.11 Evaluation protocol and metrics

Each prediction receives exactly one label: *positive* if it is a positive triple of the evaluation split, *negative* if it is one of the split's supplied negatives, and *unlabelled* otherwise. Unlabelled predictions are not treated as false, because the graph is incomplete and a missing triple may still be true. Before labelling, the evaluator checks that the split files are unchanged, that no split triple is a training triple, and that positives and negatives do not overlap. Let TP be the predictions that are positives, FP the predictions that are supplied negatives, FN the positives that were not predicted, and P the number of predictions. Then

$$\text{Benchmark precision} = \frac{TP}{TP + FP}, \qquad \text{Recall} = \frac{TP}{|\text{positives}|}, \tag{5.5}$$

$$F_1 = \frac{2TP}{2TP + FP + FN}, \qquad \text{Positive hit rate} = \frac{TP}{P}. \tag{5.6}$$

Benchmark precision uses only the labelled predictions; it is *not* accuracy over all predictions. The positive hit rate is a lower bound on the share of correct predictions, because some unlabelled predictions may be true. The evaluator also reports specificity, labelled coverage $(TP+FP)/P$, and the recall ceiling under the cap, $\sum_r \min(P_r, |\text{positives}_r|)/|\text{positives}|$, which is the best recall a cap can allow. Ranking metrics such as MRR or Hits@K are not reported, because the predictions are capped lists per relation, not answers to per-query rankings. Test evaluation requires explicit approval, so it cannot be run by accident.

5.12 Cap experiment and validation-based selection

At cap 100, many predictions in a relation have exactly the same score, so entity IDs decide which ones are kept at the boundary in 31 (V1) and 32 (V2) of the 32 capped relations. In addition, 7,681 test positives lie beyond the cap in their relation. The cap experiment therefore compares caps of 100, 250, 500 and 1,000 for both rankings (eight configurations). It runs in four steps:

1. **Freeze the selection rule.** Rule A1 was written down before any validation result existed.
2. **Generate predictions.** V1 and V2 predictions for caps 250, 500 and 1,000 were produced with the same frozen rules, candidates, scores and tie-breaks. The cap-100 baseline was reused unchanged, and the experiment checked that it could reproduce it exactly.
3. **Validate.** All eight configurations were labelled against the validation split, with the test files blocked, and rule A1 was applied.
4. **Final test.** Only the selected configuration was evaluated on the test split.

Rule A1 maximises validation recall (equivalently TP, because the denominator is the same for every configuration) subject to a precision floor: the Wilson 95% lower bound of validation benchmark precision must be at least the same bound for the cap-100 configuration of the same ranking, minus 0.05. Ties go to the smaller cap, then to V2. Validation was already used for the rule review, so validation scores are optimistic; here it is used only to choose a configuration.

6 Implementation Plan and Tools

6.1 Tools and implementation status

The pipeline is written in Python 3.10. Most stages use only the Python standard library; graph construction uses NetworkX, and the graph viewer uses pyvis. The two interfaces are static web pages built on the vis-network library, so they open in a browser without a server. Every stage records its settings and the fingerprints of its inputs and outputs in a manifest,

refuses to overwrite earlier results, and is covered by unit tests. Table 6.1 gives the status of each stage.

Table 6.1: Implementation status of the pipeline stages.

Stage	Main outputs	Status
Dataset inspection	Dataset inspection report	Completed
Training graph and viewer	Graph file, graph statistics, interactive viewer	Completed
RDF/OWL ontology	TriG dataset with three named graphs; verification manifest	Completed
Rule mining and validation review	Two mining runs; frozen 160-rule set	Completed
Candidate generation, V1 and V2 ranking	Cap-100 predictions for V1 and V2, with provenance	Completed
Prediction explorer	Static interface with graph, table, comparison and evaluation tabs	Completed
Cap-100 test evaluation	Labelled predictions and metrics for V1 and V2	Completed
Cap experiment	Predictions for caps 250–1,000; validation results; final test	Completed
Cap-comparison dashboard	Validation charts and tables; test table	Completed
Ontology-aware scoring; MRR/Hits@K; baselines	–	Planned

6.2 Rule mining results

The extended mining run scored 991 rule candidates with support of at least 5; 212 passed all thresholds and 194 were selected after redundancy and top-k filtering, 12 of them flagged as hub-dominated. The stability check selected 181 rules on the 90% split with a Jaccard overlap of 0.85; five rules were unstable. On the validation split the rules of the first run at the chosen floor cover 2,455 of 10,310 positives and 594 of 10,310 supplied negatives (coverage precision 0.805, recall 0.238); these are coverage figures of the rule bodies, not prediction metrics, and they were computed on the split that was used to choose the thresholds. After the review, 160 rules for 33 head relations were frozen.

6.3 Candidate generation results

The 160 rules produced 184,487 unique candidates for 33 relations. With a cap of 100 per relation the baseline keeps 3,239 predictions (32 relations reach the cap; child (P40) has only 39 candidates). Of these, 1,396 are supported by more than one rule, 143 of the 160 rules support at least one prediction, and the score tiers are 778 (≥ 0.7), 1,036 (0.4–0.7) and 1,425 (< 0.4); V2 has the same tiers because it reorders only inside equal-score groups. The candidate pools are very unequal: country of citizenship (P27) has 32,283 candidates, residence (P551) 20,713 and place of death (P20) 19,928, while child (P40) has 39.

6.4 Baseline test evaluation at cap 100 (Phase 6)

The cap-100 V1 and V2 predictions were evaluated on the test split in Phase 6 before the cap experiment was designed (Table 6.2). V2 recovers 21 more test positives with the same 13 supplied-negative matches. The Wilson 95% intervals of benchmark precision (V1 91.94–97.16%, V2 92.51–97.37%) overlap almost fully, so the precision difference is not meaningful; the gain is concentrated in member of (P463, +14 matches), languages spoken (P1412, +3) and part of (P361, +3). Four symmetric or structural relations (P26, P530, P3373, P495) give 141 of the matches in both versions. The recall ceiling under the cap is 23.94%.

Measure	Cap 100 V1	Cap 100 V2
Predictions	3,239	3,239
Positive test matches (TP)	257	278
Supplied-negative matches (FP)	13	13
Unlabelled predictions	2,969	2,948
of which in validation positives / negatives (information only)	246 / 12	253 / 11
Benchmark precision TP/(TP+FP)	95.19%	95.53%
Recall TP/10,311	2.49%	2.70%
F1 2TP/(2TP+FP+FN)	4.86%	5.24%
Positive hit rate TP/predictions	7.93%	8.58%
Specificity	99.87%	99.87%
Recall ceiling under the cap	23.94%	23.94%

Table 6.2: Test evaluation of the cap-100 baseline (`outputs/phase6/evaluation_test/evaluation_results.json`).

6.5 Cap experiment on the validation split

Table 6.3 and Figure 6.1 give the validation results of all eight configurations. Every configuration meets the precision floor of rule A1, so the rule selects the configuration with the most validation matches: **cap 1,000, V2** (875 matches, recall 8.49%, benchmark precision 93.38%, Wilson lower bound 91.61% against a floor of 87.69%). V2 has more matches than V1 at every cap and equal or fewer supplied-negative matches.

Config.	Pred.	TP	FP	Unlab.	Prec.	Prec. lower	Recall	F1	Hit rate
100 V1	3,239	246	12	2,981	95.35%	92.05%	2.39%	4.66%	7.59%
100 V2	3,239	253	11	2,975	95.83%	92.69%	2.45%	4.79%	7.81%
250 V1	7,464	428	21	7,015	95.32%	92.96%	4.15%	7.96%	5.73%
250 V2	7,464	477	19	6,968	96.17%	94.09%	4.63%	8.83%	6.39%
500 V1	13,571	600	40	12,931	93.75%	91.60%	5.82%	10.96%	4.42%
500 V2	13,571	653	38	12,880	94.50%	92.54%	6.33%	11.87%	4.81%
1,000 V1	23,772	816	62	22,894	92.94%	91.05%	7.91%	14.59%	3.43%
1,000 V2	**23,772**	**875**	**62**	**22,835**	**93.38%**	**91.61%**	**8.49%**	**15.56%**	**3.68%**

Table 6.3: Validation comparison of the eight configurations; recall over 10,310 validation positives. Prec. lower = Wilson 95% lower bound. Highlighted: the configuration selected by rule A1.

Figure 6.1 shows the same trend for both rankings. As the cap grows, the number of predictions, the positive matches, recall and F1 rise, while benchmark precision falls slightly and the positive hit rate falls clearly. The Wilson lower bound of V2 stays above its floor at every cap, so all configurations are eligible and the largest cap is chosen. The cap-comparison dashboard presents these results interactively from the saved files (Figure 6.3).

6.6 Final test evaluation of the selected configuration

The selected configuration was then evaluated once on the test split. Table 6.4 compares it with the cap-100 baseline, and Figure 6.2 shows the same numbers as charts. The values in the table were checked against the saved evaluation results.

The 927 matches are concentrated in a few relations (Figure 6.4): diplomatic relation (P530) alone contributes 256 (with 2 supplied-negative matches), followed by member of (P463, 97), country of citizenship (P27, 91, with 14 supplied-negative matches) and languages spoken

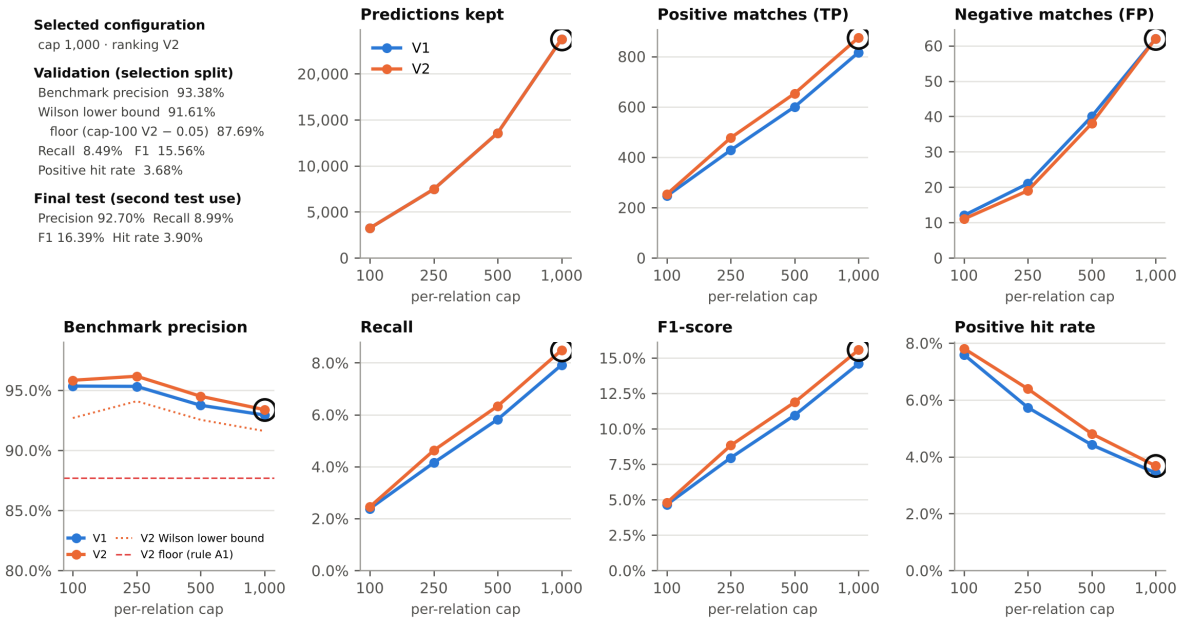


Figure 6.1: Cap comparison on the validation split, recreated from the saved validation and selection results. The summary (top left) gives the configuration selected by rule A1 and its final test values; the panels show how each metric changes with the cap for V1 and V2. The black ring marks the selected configuration (cap 1,000, V2); in the precision panel the dotted line is the Wilson lower bound for V2 and the dashed line is its selection floor.

Metric	Cap 100 V1	Cap 100 V2	Cap 1,000 V2
Predictions	3,239	3,239	23,772
Positive test matches (TP)	257	278	927
Supplied-negative matches (FP)	13	13	73
Unlabelled predictions	2,969	2,948	22,772
Benchmark precision	95.19%	95.53%	92.70%
Recall	2.49%	2.70%	8.99%
F1-score	4.86%	5.24%	16.39%
Positive hit rate	7.93%	8.58%	3.90%
Specificity	99.87%	99.87%	99.29%
Labelled coverage	8.34%	8.98%	4.21%
Recall ceiling under the cap	23.94%	23.94%	71.97%

Table 6.4: Test results of the cap-100 baseline (Phase 6) and of the selected cap-1,000 V2 configuration (second use of the test split).

(P1412, 85). Spouse (P26) reaches 50 of its 53 test positives with 496 predictions, because its candidate pool is smaller than the cap.

6.7 Discussion

Trade-off of larger caps. Raising the cap from 100 to 1,000 (V2) multiplies the predictions by 7.3 and the test matches by 3.3 (278 to 927), so recall rises from 2.70% to 8.99% and F1 from 5.24% to 16.39%. Supplied-negative matches rise from 13 to 73, so benchmark precision falls from 95.53% to 92.70%, and because most added predictions are unlabelled the positive hit rate halves (8.58% to 3.90%). The same pattern holds on validation for both versions (Figure 6.1). A larger cap therefore trades a small loss of labelled precision and a larger loss of hit rate for

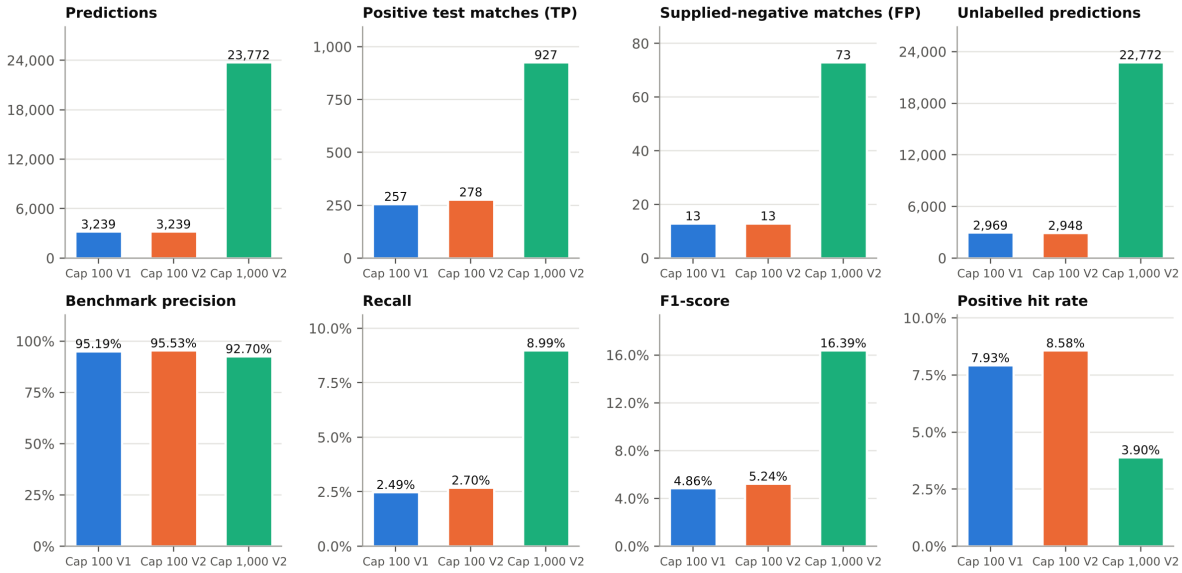


Figure 6.2: Test-split comparison of the three evaluated configurations, plotted from the saved test results.

Configuration	Predictions	Positive test matches (TP)	Supplied-negative matches (FP)	Unlabelled	Precision	Recall	F1	Positive hit rate
cap 100 · v1 (Phase 6 baseline)	3,239	257	13	2,969	95.19%	2.49%	4.86%	7.93%
cap 100 · v2 (Phase 6 baseline)	3,239	278	13	2,948	95.53%	2.70%	5.24%	8.58%
cap 1000 · v2 (selected)	23,772	927	73	22,772	92.70%	8.99%	16.39%	3.90%

Figure 6.3: Screenshot of the test section of the cap-comparison dashboard; its values agree with Table 6.4.

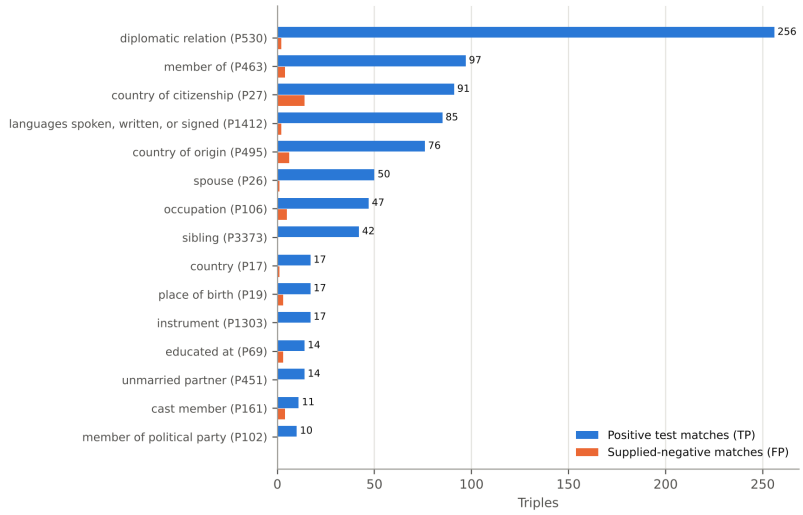


Figure 6.4: Positive and supplied-negative test matches of cap 1,000 V2 for the 15 relations with the most matches (from the saved per-relation test metrics).

more recovered positives; which side matters more depends on the use of the predictions.

Meaning of the numbers. Benchmark precision is measured on 1,000 of 23,772 predictions (4.2%); the other 22,772 are neither confirmed nor refuted, and the supplied negatives were not independently verified. The positive hit rate is only a lower bound on correct predictions. Recall

is bounded by the cap and by the 11 relations without rules (162 test positives), and observed recall is about one eighth of the 71.97% ceiling. The results describe this rule set on this benchmark; they are not evidence of superiority over published methods.

Test-set methodology. The cap-100 baseline was evaluated on the test split in Phase 6, before the cap experiment. The selected cap-1,000 V2 configuration was afterwards evaluated on the same test split. The selection was made on validation with a rule frozen beforehand, and no threshold, rule, ranking or cap was changed after either test evaluation. Nevertheless this is a second use of the test split, so the test set is not an untouched hold-out across the project's history, and the final numbers must not be used to choose another configuration. Validation itself was used twice (Phase 4 rule review and cap selection), so validation scores are optimistic.

Answers to the research questions. *RQ1:* with one- and two-atom rules and a cap of 1,000, 927 of 10,311 test positives (8.99%) are recovered, at a benchmark precision of 92.70%. *RQ2:* the evidence tie-break (V2) adds matches at every cap on validation and 21 matches at cap 100 on test, with equal or fewer supplied-negative matches, although the precision difference is within overlapping intervals and the tie-break can favour hub entities. *RQ3:* larger caps raise recall and F1 and lower benchmark precision and hit rate; the main limits are the global per-rule score, rule coverage, ties broken by IDs, hub-driven candidates, the unused ontology and the absence of ranked metrics and baselines.

6.8 Verification and reproducibility

All counts in this section were read from the saved result files and checked for consistency: for every configuration, positive matches, supplied-negative matches and unlabelled predictions add up to the number of predictions. The pipeline also protects its own inputs. Each stage checks that the files it reads are the ones recorded by the previous stage, the cap experiment confirmed that it reproduces the cap-100 baseline exactly and leaves it unchanged, and the evaluators check that the split files have not changed. The dashboard lists the source file of every number it shows, so each value can be traced back to the experiment outputs.

7 Gantt Chart

The project started in July 2026. Its work is grouped into seven tasks (Figure 7.1). The chart uses monthly columns from July to November 2026 and a separate *Future Work* column for the rest of the project period. The months of the literature review and of the earlier FB15K-237 prototype are approximate, because no dated files for them remain in the current repository. The CoDEx-M implementation (tasks 2–6) was completed in October 2026; its outputs carry generation dates of 28–29 October 2026. The prototype was superseded and none of its results is used in this report. Planned work has no fixed dates; these will be agreed with the guide.

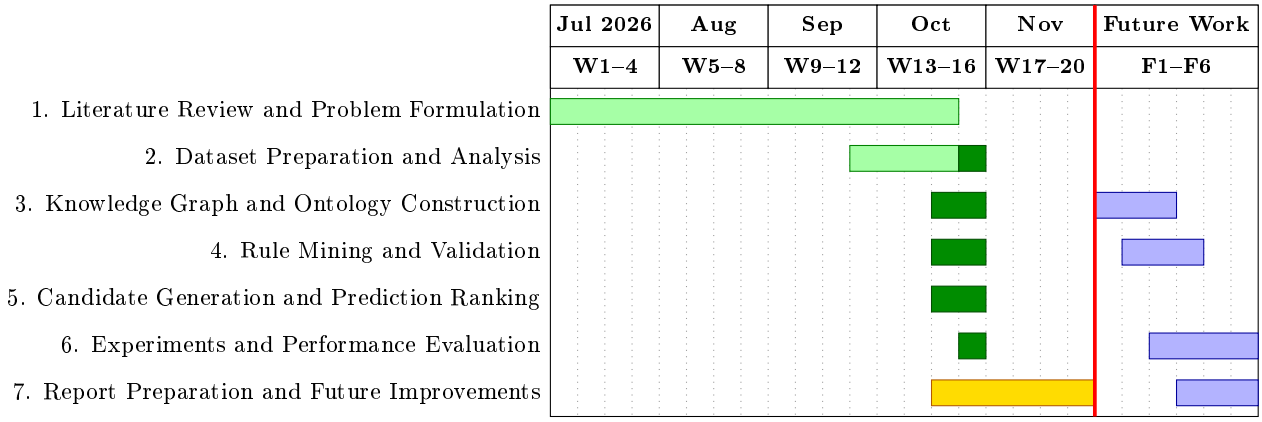


Figure 7.1: Gantt chart of the seven project tasks. Dark green: completed, placed from dated project outputs; light green: completed, period approximate; yellow: ongoing; blue: planned future work (dates to be confirmed). The red line marks the end of November 2026.

Table 7.1 summarises the status and evidence of each task, using the same task names and statuses as the chart.

No.	Task	Status	Evidence
1	Literature Review and Problem Formulation	Completed	43 papers reviewed and compared by theme; research gaps, objectives and research questions defined.
2	Dataset Preparation and Analysis	Completed	CoDEx-M splits checked for counts, format, duplicates and overlaps (dataset inspection report).
3	Knowledge Graph and Ontology Construction	Completed	Training graph (17,050 nodes, 185,584 edges), graph statistics and viewer; verified RDF/OWL dataset. *Next:* ontology-aware scoring.
4	Rule Mining and Validation	Completed	194 mined rules; 160 frozen after the validation review. *Next:* wider rule coverage.
5	Candidate Generation and Prediction Ranking	Completed	184,487 candidates; V1 and V2 rankings with provenance; prediction explorer.
6	Experiments and Performance Evaluation	Completed	Cap-100 test baseline; cap experiment on validation; final test of cap 1,000 V2; cap-comparison dashboard. *Next:* MRR/Hits@K and baselines.
7	Report Preparation and Future Improvements	In progress	This report and its figures; planned improvements in Section 9.2.

Table 7.1: Project tasks, status and evidence (same tasks as Figure 7.1).

8 Milestones and Deliverables

Table 8.1 lists one milestone for each task. Milestones M1–M6 are complete and are supported by the saved project outputs; M7 is in progress.

Table 8.1: Milestones and deliverables.

ID	Milestone	Deliverable	Status
M1	Literature base	Thematic review of 43 papers and research-gap analysis	Completed
M2	Verified dataset	Dataset inspection report	Completed
M3	Graph and ontology	Training graph, graph viewer and RDF/OWL dataset	Completed
M4	Rules	160 frozen rules with their statistics	Completed

M5	Predictions	V1 and V2 predictions for caps 100–1,000; prediction explorer	Completed
M6	Evaluation	Baseline and final test results; cap-comparison dashboard	Completed
M7	Project report and next steps	This report; plan for ontology-aware scoring, rule coverage, ranking metrics and baselines	In progress

The current deliverables are the pipeline and its saved outputs, the two interfaces, the verified results of Section 6, the architecture and workflow diagrams, and this report.

9 Conclusion

Literature and research gap. The review of 43 unique papers, grouped by research theme and including the five selected papers, shows that rule discovery and confidence estimation are well studied but mostly global: query-dependent scoring [4], probabilistic combination of rules [5], PCA confidence [2] and path explanations [10] address parts of the problem, ontology semantics enter completion mainly inside neural models [7], and evaluation mostly uses filtered ranking. What remains open is a transparent candidate score that combines rule reliability, candidate-specific evidence and a semantic-consistency check, evaluated under the open-world assumption.

Implemented system. On CoDEx-M the project verifies the splits, builds a relation-labelled training graph and an RDF/OWL dataset with separate assertion, label and provenance graphs, mines one- and two-atom rules with PCA confidence and Wilson bounds, freezes 160 rules after a validation review, generates 184,487 candidates from training facts only, ranks them with two documented tie-break policies, explains every prediction by its rules and groundings, and presents the results in a prediction explorer and a cap-comparison dashboard.

Evidence. At cap 100 the V2 ranking recovers 278 test positives (benchmark precision 95.53%, recall 2.70%) against 257 for V1. The configuration selected on validation, cap 1,000 with V2, recovers 927 test positives with 73 supplied-negative matches (benchmark precision 92.70%, recall 8.99%, F1 16.39%, positive hit rate 3.90%); 22,772 of its predictions are unlabelled and are treated as unknown.

9.1 Limitations

- The test split was used twice (cap-100 baseline, then the selected configuration), and validation was used both for the rule review and for cap selection.
- The score is a global per-rule statistic; candidate-specific evidence is used only to break ties, and scores are not calibrated probabilities.
- The ontology is generated but carries no domain, range or class axioms and does not influence mining or scoring.
- Rules have at most two body atoms and no constants; 11 relations with test positives receive no prediction, and six hub bodies were skipped.
- Ties are still broken by entity IDs at the cap boundary, and the evidence tie-break can favour hubs.
- Supplied negatives were checked only structurally; most predictions are unlabelled, so benchmark precision covers a small labelled subset.
- No MRR, Hits@K, embedding or neural baseline has been run, so no comparison with published methods is possible.
- The explanations have not been evaluated with users.

9.2 Future work

1. **Ontology-aware scoring.** Derive verified relation domains and ranges (for example from observed endpoint patterns reviewed against an authoritative source), add a consistency factor to the score, and keep it only if an ablation on validation shows a gain.
2. **Evidence-aware scoring.** Move distinct body matches, with a hub penalty, from the tie-break into the score, and compare noisy-OR and probabilistic combination [5].
3. **Coverage.** Add longer rules, rules with constants and object identity [1].
4. **Ranking protocol.** Define per-query candidate universes and a tie policy [4] to report filtered MRR and Hits@K.
5. **Baselines.** Train embedding baselines (TransE, DistMult, ComplEx, RotatE [17–20]) on the same splits.
6. **Clean evaluation.** Freeze all Phase 2 choices on validation and report one final evaluation; consider a fresh held-out sample for annotation of unlabelled predictions.

Ontology-aware scoring will be claimed to help only if an ablation shows it.

10 References

The references are numbered in the order of discussion in Section 3 (most relevant themes first) and grouped by research theme. References [1]–[43] are the 43 unique papers of the supplied archive; † marks the five selected papers. Reference [44] is the dataset source and is not part of the reviewed archive. Entries marked as preprints have not been verified as peer-reviewed.

1. Rule-Based Knowledge Graph Completion and Logical Rule Learning

[1] C. Meilicke, M. W. Chekol, P. Betz, M. Fink, and H. Stuckenschmidt, "Anytime bottom-up rule learning for large-scale knowledge graph completion," *The VLDB Journal*, vol. 33, pp. 131–161, 2024, doi: 10.1007/s00778-023-00800-5.

[2] L. Wu, E. Sallinger, E. Sherkhonov, S. Vahdati, and G. Gottlob, "Rule learning over knowledge graphs with genetic logic programming," in *Proc. IEEE 38th Int. Conf. Data Engineering (ICDE)*, pp. 3373–3385, 2022, doi: 10.1109/ICDE53745.2022.00318. †

[3] P. Ghiasnezhad Omran, K. Taylor, S. Rodríguez Méndez, and A. Haller, "Active knowledge graph completion," *Information Sciences*, vol. 604, pp. 267–279, 2022, doi: 10.1016/j.ins.2022.05.027.

2. Rule Confidence and Candidate-Specific Scoring

[4] T. H. Le, T. C. Son, I. Ahmed, and H. Cao, "SLogic: Subgraph-informed logical rule learning for knowledge graph completion," arXiv preprint arXiv:2510.00279 (v3), 2025. †

[5] J. M. Patil, N. Lee, A. M. S. Chowdhury, Y. Choi, and P. Shakarian, "Probabilistic circuits for knowledge graph completion with reduced rule sets," arXiv preprint arXiv:2508.06706 (v2), 2025. †

3. Ontology-Based Reasoning and Semantic Constraints

[6] W. Zhang, J. Chen, J. Li, Z. Xu, J. Z. Pan, and H. Chen, "Knowledge graph reasoning with logics and embeddings: survey and perspective," in *Proc. IEEE Int. Conf. Knowledge Graph (ICKG)*, pp. 492–499, 2024, doi: 10.1109/ICKG63256.2024.00069.

[7] J. Wang, W. Li, X. Zhang, Q. Hu, A. M. Luvembe, R. Liu, F. Liu, and Q. Jin, "Ontology-enhanced subgraph reasoning with prompt learning for inductive knowledge graph completion," *Expert Systems with Applications*, vol. 320, art. 131944, 2026, doi: 10.1016/j.eswa.2026.131944.

[8] X. Lv, L. Hou, J. Li, and Z. Liu, "Differentiating concepts and instances for knowledge graph embedding," in *Proc. Conf. Empirical Methods in Natural Language Processing (EMNLP)*, pp. 1971–1979, 2018.

[9] T. S. Balakrishnan, L. Karthikeyan, U. S. Ebenezar, and B. S. Preetham, "Ontology-driven semantic interoperability framework for multi-center healthcare big data with graph-based query analysis," in *Proc. Int. Conf. Computing for Sustainability and Intelligent Future (COMP-SIF)*, 2025, doi: 10.1109/COMP-SIF65618.2025.10969920.

4. Explainable Knowledge Graph Inference

[10] H. Yu, H. Yu, W. Wang, K. Fang, X. Zhang, and H. Liu, "An explainable path reasoning framework for knowledge graph completion," *Alexandria Engineering Journal*, vol. 134, pp. 321–328, 2026, doi: 10.1016/j.aej.2025.12.024.

[11] X. Li, Q. Liu, Q. Bai, and X. Xu, "The role of knowledge graphs on responsible artificial intelligence realization: research opportunities and challenges," *Computer (IEEE)*, 2025, doi: 10.1109/MC.2025.3545036.

5. Neural-Symbolic Reasoning and Differentiable Rule Learning

[12] F. Yang, Z. Yang, and W. W. Cohen, "Differentiable learning of logical rules for knowledge base reasoning," in *Advances in Neural Information Processing Systems 30 (NIPS 2017)*, 2017, arXiv:1702.08367. †

[13] M. Qu, J. Chen, L.-P. Xhonneux, Y. Bengio, and J. Tang, "RNNLogic: learning logic rules for reasoning on knowledge graphs," in *Proc. Int. Conf. Learning Representations (ICLR)*, 2021, arXiv:2010.04029.

[14] K. Cheng, N. K. Ahmed, and Y. Sun, "Neural compositional rule learning for knowledge graph reasoning," in *Proc. Int. Conf. Learning Representations (ICLR)*, 2023, arXiv:2303.03581.

[15] P. Sen, B. W. S. R. de Carvalho, I. Abdelaziz, P. Kapanipathi, S. Roukos, and A. Gray, "Logical neural networks for knowledge base completion with embeddings and rules," in *Proc. Conf. Empirical Methods in Natural Language Processing (EMNLP)*, pp. 3863–3875, 2022.

[16] X. Zhang, Z. Wang, G. Rao, and K. Wang, "Implicit and explicit rule injection for complex query answering over knowledge graphs," in *Proc. IEEE Int. Conf. Acoustics, Speech and Signal Processing (ICASSP)*, 2025, doi: 10.1109/ICASSP49660.2025.10889593.

6. Knowledge Graph Embeddings and Link Prediction

[17] B. Yang, W. Yih, X. He, J. Gao, and L. Deng, "Embedding entities and relations for learning and inference in knowledge bases," in *Proc. Int. Conf. Learning Representations (ICLR)*, 2015, arXiv:1412.6575.

[18] T. Trouillon, J. Welbl, S. Riedel, É. Gaussier, and G. Bouchard, "Complex embeddings for simple link prediction," in *Proc. 33rd Int. Conf. Machine Learning (ICML)*, 2016, arXiv:1606.06357.

[19] Z. Sun, Z.-H. Deng, J.-Y. Nie, and J. Tang, "RotatE: knowledge graph embedding by relational rotation in complex space," in *Proc. Int. Conf. Learning Representations (ICLR)*, 2019, arXiv:1902.10197.

[20] A. Bordes, N. Usunier, A. García-Durán, J. Weston, and O. Yakhnenko, "Translating embeddings for modeling multi-relational data," in *Advances in Neural Information Processing Systems 26 (NIPS 2013)*, 2013.

[21] Z. Wang, J. Zhang, J. Feng, and Z. Chen, "Knowledge graph embedding by translating on hyperplanes," in *Proc. 28th AAAI Conf. Artificial Intelligence*, 2014.

[22] Y. Lin, Z. Liu, M. Sun, Y. Liu, and X. Zhu, "Learning entity and relation embeddings for knowledge graph completion," in *Proc. 29th AAAI Conf. Artificial Intelligence*, 2015.

[23] M. Fan, Q. Zhou, E. Chang, and T. F. Zheng, "Transition-based knowledge graph embedding with relational mapping properties," in *Proc. 28th Pacific Asia Conf. Language, Information and Computation (PACLIC)*, pp. 328–337, 2014.

7. Graph Neural Networks and Advanced Learning Methods

[24] Z. Shang, P. Wang, J. Liu, J. Liu, G. Li, Z. Xu, Z. Luo, X. Chen, and W. Ke, "Learning multi-granularity and adaptive representation for knowledge graph reasoning," *IEEE Trans. Knowledge and Data Engineering*, vol. 37, no. 9, 2025, doi: 10.1109/TKDE.2025.3579774.

[25] K. Yang, H. Gao, and Y. Yang, "Entities and relations aware graph convolutional network for knowledge base completion," in *Proc. IEEE 9th Int. Conf. Information, Communication and Networks (ICICN)*, 2021, doi: 10.1109/ICICN52636.2021.9673867.

[26] Q. Wu and Q. He, "Knowledge graph embedding based graph convolutional network for link prediction," in *Proc. 11th Int. Conf. Advanced Cloud and Big Data (CBD)*, 2023, doi: 10.1109/CBD63341.2023.00050.

[27] Q. Rao and T. Wang, "Semantic enhancement based knowledge graph completion for graph convolutional neural networks," in *Proc. 7th Int. Conf. Electrical, Mechanical and Computer Engineering (ICEMCE)*, 2023, doi: 10.1109/ICEMCE60359.2023.10490589.

[28] Z. Ye, Y. J. Kumar, G. O. Sing, F. Song, and J. Wang, "A comprehensive survey of graph neural networks for knowledge graphs," *IEEE Access*, vol. 10, 2022, doi: 10.1109/ACCESS.2022.3191784.

[29] B. Khemani, S. Patil, K. Kotecha, and S. Tanwar, "A review of graph neural networks: concepts, architectures, techniques, challenges, datasets, applications, and future directions," *Journal of Big Data*, vol. 11, art. 18, 2024, doi: 10.1186/s40537-023-00876-4.

[30] M. Kharbanda, R. R. Shah, and R. Mutharaju, "RConE: rough cone embedding for multi-hop logical query answering on multi-modal knowledge graphs," *IEEE Trans. Knowledge and Data Engineering*, vol. 37, no. 10, pp. 6135–6146, 2025, doi: 10.1109/TKDE.2025.3584054.

[31] Y. Liu, D. Chen, Y. Fu, H. Bai, H. Cui, and R. Peng, "Process knowledge graph reasoning based on graph neural network," in *Proc. 37th Chinese Control and Decision Conf. (CCDC)*, 2025, doi: 10.1109/CCDC65474.2025.11090305.

[32] Y. Wang, Y. Chen, and J. Sun, "Fault prediction method for industrial Internet of Things based on knowledge graph," in *Proc. 5th Int. Conf. Machine Learning and Intelligent Systems Engineering (MLISE)*, 2025, doi: 10.1109/MLISE66443.2025.11100161.

8. Knowledge Graph Surveys, Benchmarks and Evaluation

[33] H. Liu, S. Yang, G. Shi, and Z. Miao, "Knowledge graph reasoning: mainstream methods, applications and prospects," *Engineering Applications of Artificial Intelligence*, vol. 159, art. 111625, 2025, doi: 10.1016/j.engappai.2025.111625.

[34] G. Niu, B. Li, and Y. Lin, "A comprehensive survey of knowledge graph reasoning: approaches and applications," *IEEE Trans. Big Data*, vol. 12, no. 3, pp. 721–740, 2026, doi: 10.1109/TBDATA.2026.3668633.

[35] D. Li, Y. Liang, S. Qian, H. Wu, W. Jia, Y. Fu, and Y. Sun, "A review of background, methods, limitations and opportunities of knowledge graph completion," *Computer Science Review*, vol. 58, art. 100809, 2025, doi: 10.1016/j.cosrev.2025.100809.

[36] S. Ji, S. Pan, E. Cambria, P. Marttinen, and P. S. Yu, "A survey on knowledge graphs: representation, acquisition, and applications," *IEEE Trans. Neural Networks and Learning Systems*, vol. 33, no. 2, pp. 494–514, 2022, doi: 10.1109/TNNLS.2021.3070843.

[37] Q. Wang, Z. Mao, B. Wang, and L. Guo, "Knowledge graph embedding: a survey of approaches and applications," *IEEE Trans. Knowledge and Data Engineering*, vol. 29, no. 12, pp. 2724–2743, 2017, doi: 10.1109/TKDE.2017.2754499.

[38] M. Wang, L. Qiu, and X. Wang, "A survey on knowledge graph embeddings for link prediction," *Symmetry*, vol. 13, no. 3, art. 485, 2021, doi: 10.3390/sym13030485.

[39] J. Cao, J. Fang, Z. Meng, and S. Liang, "Knowledge graph embedding: a survey from the perspective of representation spaces," *ACM Computing Surveys*, vol. 56, no. 6, art. 159, pp. 1–42, 2024, doi: 10.1145/3643806. †

[40] R. Biswas, L.-A. Kaffee, M. Cochez, S. Dumbrava, T. E. Jendal, M. Lissandrini, V. Lopez, E. Loza Mencía, H. Paulheim, H. Sack, E. Kalemi Vakaj, and G. de Melo, "Knowledge graph embeddings: open challenges and opportunities," *Transactions on Graph Data and Knowledge*, vol. 1, no. 1, art. 4, 2023, doi: 10.4230/TGDK.1.1.4.

[41] J. Sardina, J. D. Kelleher, and D. O'Sullivan, "A survey on knowledge graph structure and knowledge graph embeddings," in *Proc. 19th Int. Conf. Semantic Computing (ICSC)*, 2025, doi: 10.1109/ICSC64641.2025.00008.

[42] G. A. Gesese, R. Biswas, M. Alam, and H. Sack, "A survey on knowledge graph embeddings with literals: which model links better literal-ly?," *Semantic Web*, vol. 12, no. 4, pp. 617–647, 2021, doi: 10.3233/SW-200404.

[43] Z. Wang and A. Li, "Temporal knowledge graph reasoning: a survey of representation learning, rule-based learning, and neural-symbolic hybrid methods," in *Proc. 10th IEEE Int. Conf. Data Science in Cyberspace (DSC)*, 2025, doi: 10.1109/DSC67331.2025.00019.

Dataset source (not part of the reviewed archive)

[44] T. Safavi and D. Koutra, "CoDEx: A comprehensive knowledge graph completion benchmark," in *Proc. Conf. Empirical Methods in Natural Language Processing (EMNLP)*, pp. 8328–8350, 2020.